



Recessed and Ceiling

LED professional lighting



Prim@lux

L I G H T S D I V I S I O N

PrimoLUX, the lighting division of PrimOtek, a dynamic and constantly growing company with thirty years of experience, able to offer an increasingly complete range of lighting and light control solutions. Continuous commitment to research and development and accurate control of the entire production process. From product design to its realization up to use in the most sophisticated creations. The mix of specialist skills, innovation and attention to detail are the goals of the company, which brings to elegant and functional design products, able to meet the most demanding technical and aesthetic needs of any project. All the products of the PrimoLux line by PrimOtek are made using the most modern technologies and with the highest quality components that guarantee reliability and efficiency over time.





SUITE LED 4

.....



STOR LED 8

.....



DLX LED 10

.....



SGL LED 14

.....



WK IP65 LED 20

.....



WK IP65 LED 24

.....



LAPIS LED 26

.....



AKIS LED 28

.....



SUI LED 30



.....

Ceiling recessed lights



Suite LED



Ceiling recessed lights



- Die-cast aluminum body.
- Anti-yellowing powder coating UV stabilized.
- Metallized polycarbonate reflectors.
- PC upper screen.
- Built in compliance with standards EN 60598-1 and EN 60598-2-2.

SOURCE

- COB LED with nominal efficiency up to 135 lumen / Watt (4000K - 270mA - CRI > 92 - Tj = 85 ° C).
- Rated LED life: > 50000h with L70.
- Selection: <3 SDCM.

INSTALLATION

- Recessed installation.
- Fixing with steel springs.

These devices are designed for modern control systems.
For the different possibilities see the section "Light control".

DIMENSIONS

- 20W: Ø110 x H.87mm, hole Ø95mm
- 12W: Ø85 x H.85mm, hole Ø75mm

Ceiling Recessed Lights

Suite LED 20W

220V 240V	95 mm	UGR <19	IP20 IP44	IK 08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	-------	------------	--------------	----------	--	------------------------	----	------	------------------

(W) White Reflector - 60° Standard Optic

	cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
	RC0220LW-927	20W	2700 K	92	2103 lm	on-off
	RCD0220LW-927	20W	2700 K	92	2103 lm	DALI
	RC0220LW-930	20W	3000 K	92	2191 lm	on-off
	RCD0220LW-930	20W	3000 K	92	2191 lm	DALI
	RC0220LW-940	20W	4000 K	92	2221 lm	on-off
	RCD0220LW-940	20W	4000 K	92	2221 lm	DALI

(S) Shiny Silver Reflector - 60° Standard Optic

	cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
	RC0220LS-927	20W	2700 K	92	2103 lm	on-off
	RCD0220LS-927	20W	2700 K	92	2103 lm	DALI
	RC0220LS-930	20W	3000 K	92	2191 lm	on-off
	RCD0220LS-930	20W	3000 K	92	2191 lm	DALI
	RC0220LS-940	20W	4000 K	92	2221 lm	on-off
	RCD0220LS-940	20W	4000 K	92	2221 lm	DALI

ACCESSORIES



cod. REF020-N
(N) Shiny Black Reflector



cod. REF020-B
(B) Matt Black Reflector



cod. REF020-G
(G) Shiny Gold Reflector



cod. LEN020-S
(S) 20° Lens



cod. LEN020-M
(M) 36° Lens

Ceiling Recessed Lights

Suite LED

12W

220V 240V	75 mm	UGR <19	IP20 IP44	IK 08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	-------	------------	--------------	----------	--	------------------------	----	------	------------------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0212LW-927	12W	2700 K	92	1526 lm	on-off
RCD0212LW-927	12W	2700 K	92	1526 lm	DALI
RC0212LW-930	12W	3000 K	92	1590 lm	on-off
RCD0212LW-930	12W	3000 K	92	1590 lm	DALI
RC0212LW-940	12W	4000 K	92	1611 lm	on-off
RCD0212LW-940	12W	4000 K	92	1611 lm	DALI

(S) Shiny Silver Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0212LS-927	12W	2700 K	92	1526 lm	on-off
RCD0212LS-927	12W	2700 K	92	1526 lm	DALI
RC0212LS-930	12W	3000 K	92	1590 lm	on-off
RCD0212LS-930	12W	3000 K	92	1590 lm	DALI
RC0212LS-940	12W	4000 K	92	1611 lm	on-off
RCD0212LS-940	12W	4000 K	92	1611 lm	DALI

ACCESSORIES



cod. REF012-N
(N) Shiny Black Reflector



cod. REF012-B
(B) Matt Black Reflector



cod. REF012-G
(G) Shiny Gold Reflector



cod. LEN012-S
(S) 20° Lens



cod. LEN012-M
(M) 36° Lens

Ceiling recessed lights



Stor 40W LED

- Die-cast aluminum body.
- Anti-yellowing powder coating
- UV stabilized.
- Metallized polycarbonate reflectors.
- Interchangeable graduated internal reflector.
- PC upper screen.
- Built in compliance with standards EN 60598-1 and EN 60598-2-2.

SOURCE

- COB LED with nominal efficiency up to 135 lumen / Watt (4000K - 270mA - CRI> 92 - T_j = 85 ° C).
- Rated LED life:> 50000h with L70.
- Selection: <3 SDCM.

INSTALLATION

- Recessed installation.
- Fixing with steel springs.

These devices are designed for modern control systems.

For the different possibilities see the section "Light control".

DIMENSIONS

Ø197 x H.140mm, hole Ø185 mm



Recessed Ceiling Lights



Stor LED 40W

220V 240V	185mm	UGR <19	IP20 IP44	IK 08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	-------	------------	--------------	----------	--	------------------------	----	------	------------------

(W) Shiny White Reflector - 45° Standard Optic

	cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
	RC0840LW-927	40W	2700 K	92	4205 lm	on-off
	RCD0840LW-927	40W	2700 K	92	4205 lm	DALI
	RC0840LW-930	40W	3000 K	92	4380 lm	on-off
	RCD0840LW-930	40W	3000 K	92	4380 lm	DALI
	RC0840LW-940	40W	4000 K	92	4430 lm	on-off
	RCD0840LW-940	40W	4000 K	92	4430 lm	DALI

ACCESSORIES



cod. REF040-S
(S) Shiny Silver Reflector



cod. REF040-N
(N) Shiny Black Reflector







cod. REF40DW-N
15° Inside Reflector



cod. REF40DW-M
30° Inside Reflector

Trimless Recessed Down Light

DLX LED

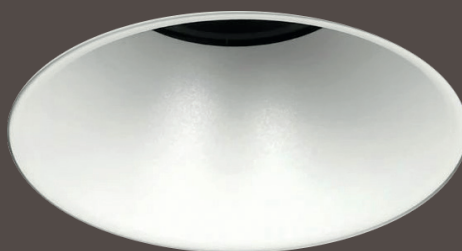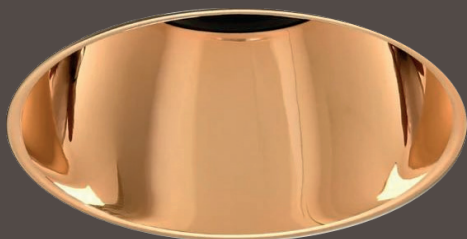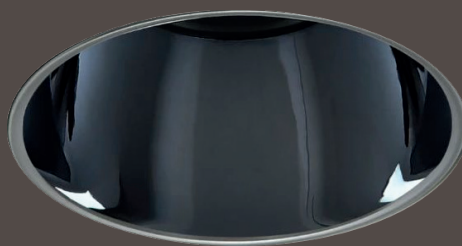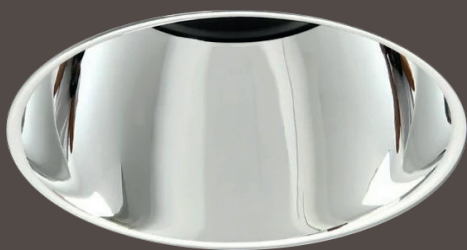

Trimless Recessed Down Light



- Trimless recessed downlight
 - Concealed fixing system without support stop.
 - Die-cast aluminum body.
 - Anti-yellowing powder coating
- UV stabilized.

- Metallized polycarbonate reflectors.
- PC upper screen.
- Built in compliance with standards EN 60598-1 and EN 60598-2-2.

SOURCE

- COB LED with nominal efficiency up to 135 lumen / Watt (4000K - 270mA - CRI> 92 - Tj = 85 ° C).
- Rated LED life:> 50000h with L70.
- Selection: <3 SDCM.

INSTALLATION

- Concealed recessed installation.
 - Fixing by means of a crown system to be integrated into the false ceiling.
- These devices are designed for modern control systems.
For the different possibilities see the section "Light control".

DIMENSIONS

- 20W: Ø130 x H.87mm, hole Ø95mm
- 12W: Ø101 x H.70mm, hole Ø75mm

Trimeless Recessed Ceiling Light

DLX LED 20W



(W) White Reflector - 60° Standard Optic

	cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
	RC0320LW-927	20W	2700 K	92	2103 lm	on-off
	RCD0320LW-927	20W	2700 K	92	2103 lm	DALI
	RC0320LW-930	20W	3000 K	92	2191 lm	on-off
	RCD0320LW-930	20W	3000 K	92	2191 lm	DALI
	RC0320LW-940	20W	4000 K	92	2221 lm	on-off
	RCD0320LW-940	20W	4000 K	92	2221 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic

	cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
	RC0320LB-927	20W	2700 K	92	2103 lm	on-off
	RCD0320LB-927	20W	2700 K	92	2103 lm	DALI
	RC0320LB-930	20W	3000 K	92	2191 lm	on-off
	RCD0320LB-930	20W	3000 K	92	2191 lm	DALI
	RC0320LB-940	20W	4000 K	92	2221 lm	on-off
	RCD0320LB-940	20W	4000 K	92	2221 lm	DALI

ACCESSORIES



cod. REF020-N
(N) Shiny Black Reflector



cod. REF020-S
(S) Shiny Silver Reflector



cod. REF020-G
(G) Shiny Gold Reflector



cod. LEN020-S
(S) 20° Lens



cod. LEN020-M
(M) 36° Lens

Trimeless Recessed Ceiling Light

DLX LED

12W

220V 240V	75 mm	UGR <19	IP20 IP44	IK 08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	-------	------------	--------------	----------	--	------------------------	----	------	------------------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RCO312LW-927	12W	2700 K	92	1526 lm	on-off
RCD0312LW-927	12W	2700 K	92	1526 lm	DALI
RCO312LW-930	12W	3000 K	92	1590 lm	on-off
RCD0312LW-930	12W	3000 K	92	1590 lm	DALI
RCO312LW-940	12W	4000 K	92	1611 lm	on-off
RCD0312LW-940	12W	4000 K	92	1611 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RCO312LB-927	12W	2700 K	92	1526 lm	on-off
RCD0312LB-927	12W	2700 K	92	1526 lm	DALI
RCO312LB-930	12W	3000 K	92	1590 lm	on-off
RCD0312LB-930	12W	3000 K	92	1590 lm	DALI
RCO312LB-940	12W	4000 K	92	1611 lm	on-off
RCD0312LB-940	12W	4000 K	92	1611 lm	DALI

ACCESSORIES



cod. REF012-N
(N) Shiny Black Reflector



cod. REF012-S
(S) Shiny Silver Reflector



cod. REF012-G
(G) Shiny Gold Reflector



cod. LEN012-S
(S) 20° Lens



cod. LEN012-M
(M) 36° Lens

Recessed Ceiling Light

SGL LED



RoHS



Recessed Ceiling Light



- Modular recessed ceiling system
- Die-cast aluminum body.
- Anti-yellowing powder coating
- UV stabilized.
- Interchangeable metallized polycarbonate reflectors.
- PC upper screen.
- Built in compliance with standards
- EN 60598-1 and EN 60598-2-2.

SOURCE

- COB LED with nominal efficiency up to 135 lumen / Watt (4000K - 270mA - CRI > 92 - Tj = 85 ° C).
- Rated LED life: > 50000h with L70.
- Selection: <3 SDCM.

INSTALLATION

- Recessed installation.
- Fixing with steel springs.

These devices are designed for modern control systems.

For the different possibilities see the section "Light control".

DIMENSIONS

- 20W: 115 x 115 x H87mm, hole Ø95mm
- 12W: 88 x 88 x H85mm, hole Ø75mm
- 2x20W: 216 x 115 x H87mm, hole 200x95mm
- 2x12W: 168 x 88 x H85mm, hole 160x75mm
- 3x20W: 318 x 115 x H87mm, hole 300x95mm
- 3x12W: 247 x 88 x H85mm, hole 240x75mm

Recessed Ceiling Light

SGL LED

20W



(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0520LW-927	20W	2700 K	92	2103 lm	on-off
RCD0520LW-927	20W	2700 K	92	2103 lm	DALI
RC0520LW-930	20W	3000 K	92	2191 lm	on-off
RCD0520LW-930	20W	3000 K	92	2191 lm	DALI
RC0520LW-940	20W	4000 K	92	2221 lm	on-off
RCD0520LW-940	20W	4000 K	92	2221 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0520LB-927	20W	2700 K	92	2103 lm	on-off
RCD0520LB-927	20W	2700 K	92	2103 lm	DALI
RC0520LB-930	20W	3000 K	92	2191 lm	on-off
RCD0520LB-930	20W	3000 K	92	2191 lm	DALI
RC0520LB-940	20W	4000 K	92	2221 lm	on-off
RCD0520LB-940	20W	4000 K	92	2221 lm	DALI

Recessed Ceiling Light

SGL LED

2 x 20W



(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0540LW-927	40W	2700 K	92	2 x 2103 lm	on-off
RCD0540LW-927	40W	2700 K	92	2 x 2103 lm	DALI
RC0540LW-930	40W	3000 K	92	2 x 2191 lm	on-off
RCD0540LW-930	40W	3000 K	92	2 x 2191 lm	DALI
RC0540LW-940	40W	4000 K	92	2 x 2221 lm	on-off
RCD0540LW-940	40W	4000 K	92	2 x 2221 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0540LB-927	40W	2700 K	92	2 x 2103 lm	on-off
RCD0540LB-927	40W	2700 K	92	2 x 2103 lm	DALI
RC0540LB-930	40W	3000 K	92	2 x 2191 lm	on-off
RCD0540LB-930	40W	3000 K	92	2 x 2191 lm	DALI
RC0540LB-940	40W	4000 K	92	2 x 2221 lm	on-off
RCD0540LB-940	40W	4000 K	92	2 x 2221 lm	DALI

Recessed Ceiling Light

SGL LED

3 x 20W

220V 240V	300 x 75 mm	UGR <19	IP20 IP44	IK 08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	-------------	------------	--------------	----------	--	------------------------	----	------	------------------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0560LW-927	60W	2700 K	92	3 x 2103 lm	on-off
RCD0560LW-927	60W	2700 K	92	3 x 2103 lm	DALI
RC0560LW-930	60W	3000 K	92	3 x 2191 lm	on-off
RCD0560LW-930	60W	3000 K	92	3 x 2191 lm	DALI
RC0560LW-940	60W	4000 K	92	3 x 2221 lm	on-off
RCD0560LW-940	60W	4000 K	92	3 x 2221 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0560LB-927	60W	2700 K	92	3 x 2103 lm	on-off
RCD0560LB-927	60W	2700 K	92	3 x 2103 lm	DALI
RC0560LB-930	60W	3000 K	92	3 x 2191 lm	on-off
RCD0560LB-930	60W	3000 K	92	3 x 2191 lm	DALI
RC0560LB-940	60W	4000 K	92	3 x 2221 lm	on-off
RCD0560LB-940	60W	4000 K	92	3 x 2221 lm	DALI

ACCERSSORIES



cod. REF020-S
(S) Shiny Silver Reflector



cod. REF020-G
(G) Shiny Gold Reflector



cod. LEN020-S
(S) 24° Lens



cod. LEN020-L
(L) 60° Lens

Recessed Ceiling Light

SGL LED

12W

220V 240V	 75 mm	UGR <19	IP20 IP44	IK 08		 ECODESIGN COMPLIANT	 RoHS	Ta -20° +45°C
--------------	---	------------	--------------	----------	---	--	---	------------------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0512LW-927	12W	2700 K	92	1526 lm	on-off
RCD0512LW-927	12W	2700 K	92	1526 lm	DALI
RC0512LW-930	12W	3000 K	92	1590 lm	on-off
RCD0512LW-930	12W	3000 K	92	1590 lm	DALI
RC0512LW-940	12W	4000 K	92	1611 lm	on-off
RCD0512LW-940	12W	4000 K	92	1611 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0512LB-927	12W	2700 K	92	1526 lm	on-off
RCD0512LB-927	12W	2700 K	92	1526 lm	DALI
RC0512LB-930	12W	3000 K	92	1590 lm	on-off
RCD0512LB-930	12W	3000 K	92	1590 lm	DALI
RC0512LB-940	12W	4000 K	92	1611 lm	on-off
RCD0512LB-940	12W	4000 K	92	1611 lm	DALI

Recessed Ceiling Light

SGL LED

2 x 12W

220V 240V	 160 x 75 mm	UGR <19	IP20 IP44	IK 08		 ECODESIGN COMPLIANT	 RoHS
--------------	---	------------	--------------	----------	---	--	---

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC05124LW-927	24W	2700 K	92	2 x 1526 lm	on-off
RCD05124LW-927	24W	2700 K	92	2 x 1526 lm	DALI
RC05124LW-930	24W	3000 K	92	2 x 1590 lm	on-off
RCD05124LW-930	24W	3000 K	92	2 x 1590 lm	DALI
RC05124LW-940	24W	4000 K	92	2 x 1611 lm	on-off
RCD05124LW-940	24W	4000 K	92	2 x 1611 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic




cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0524LB-927	24W	2700 K	92	2 x 1526 lm	on-off
RCD0524LB-927	24W	2700 K	92	2 x 1526 lm	DALI
RC0524LB-930	24W	3000 K	92	2 x 1590 lm	on-off
RCD0524LB-930	24W	3000 K	92	2 x 1590 lm	DALI
RC0524LB-940	24W	4000 K	92	2 x 1611 lm	on-off
RCD0524LB-940	24W	4000 K	92	2 x 1611 lm	DALI

Recessed Ceiling Light

SGL LED

3 x 12W

220V 240V	 240 x 75 mm	UGR <19	IP20 IP44	IK 08		 ECODESIGN COMPLIANT	 CE	RoHS
--------------	---	------------	--------------	----------	---	--	--	------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0536LW-927	60W	2700 K	92	3 x 1526 lm	on-off
RCD0536LW-927	60W	2700 K	92	3 x 1526 lm	DALI
RC0536LW-930	60W	3000 K	92	3 x 1590 lm	on-off
RCD0536LW-930	60W	3000 K	92	3 x 1590 lm	DALI
RC0536LW-940	60W	4000 K	92	3 x 1611 lm	on-off
RCD0536LW-940	60W	4000 K	92	3 x 1611 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0536LB-927	36W	2700 K	92	3 x 1526 lm	on-off
RCD0536LB-927	36W	2700 K	92	3 x 1526 lm	DALI
RC0536LB-930	36W	3000 K	92	3 x 1590 lm	on-off
RCD0536LB-930	36W	3000 K	92	3 x 1590 lm	DALI
RC0536LB-940	36W	4000 K	92	3 x 1611 lm	on-off
RCD0536LB-940	36W	4000 K	92	3 x 1611 lm	DALI

ACCESSORIES



cod. REF012-S
(S) Shiny Silver Reflector



cod. REF012-G
(G) Shiny Gold Reflector



cod. LEN012-S
(S) 24° Lens



cod. LEN012-L
(L) 60° Lens

IP65 Recessed Ceiling Light

WH LED IP65



RoHS



**ECODESIGN
COMPLIANT**

IP65 Recessed Ceiling Light



- IP65 recessed ceiling
- Die-cast aluminum body.
- Anti-yellowing powder coating UV stabilized.
- Interchangeable metallized polycarbonate reflectors.
- PC upper screen.
- Built in compliance with standards EN 60598-1 and EN 60598-2-2.

SOURCE

- COB LED with nominal efficiency up to 135 lumen / Watt (4000K - 270mA - CRI > 92 - Tj = 85 ° C).
- Rated LED life: > 50000h with L70.
- Selection: <3 SDCM.

INSTALLATION

- Recessed installation.
- Fixing with steel springs.

These devices are designed for modern control systems.

For the different possibilities see the section "Light control".

DIMENSIONS: • 25W: 130 x H.77mm, hole Ø120mm / • 10W: Ø85 x H.55mm, hole Ø75mm

- 10W: Ø85 x H.55mm, hole Ø75mm
- 25W: 130 x H.77mm, hole Ø120mm
- 10W: Ø85 x H.55mm, hole Ø75mm

DIMENSIONS

- 25W: 130 x H.77mm, hole Ø120mm
- 10W: Ø85 x H.55mm, hole Ø75mm
- 25W: 130 x H.77mm, hole Ø120mm
- 10W: Ø85 x H.55mm, hole Ø75mm

Recessed Ceiling Light

WH-25 LED

25W - 40° - IP65

220V 240V	120mm	UGR <19	IP65 IP65	IK 08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	-------	------------	--------------	----------	--	------------------------	----	------	------------------

(W) White Reflector



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0125W-927	25W	2700 K	92	2405 lm	on-off
RCD0125W-927	25W	2700 K	92	2405 lm	DALI
RC0125W-930	25W	3000 K	92	2504 lm	on-off
RCD0125W-930	25W	3000 K	92	2504 lm	DALI
RC0125W-940	25W	4000 K	92	2538 lm	on-off
RCD0125W-940	25W	4000 K	92	2538 lm	DALI

(B) Matt Black Reflector




cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0125B-927	25W	2700 K	92	2405 lm	on-off
RCD0125B-927	25W	2700 K	92	2405 lm	DALI
RC0125B-930	25W	3000 K	92	2504 lm	on-off
RCD0125B-930	25W	3000 K	92	2504 lm	DALI
RC0125B-940	25W	4000 K	92	2538 lm	on-off
RCD0125B-940	25W	4000 K	92	2538 lm	DALI

(S) Shiny Silver Reflector



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0125S-927	25W	2700 K	92	2103 lm	on-off
RCD0125S-927	25W	2700 K	92	2103 lm	DALI
RC0125S-930	25W	3000 K	92	2504 lm	on-off
RCD0125S-930	25W	3000 K	92	2504 lm	DALI
RC0125S-940	25W	4000 K	92	2538 lm	on-off
RCD0125S-940	25W	4000 K	92	2538 lm	DALI



Recessed Ceiling Light

WH-10 LED

10W - 40° - IP65

220V 240V	 75 mm	UGR <19	IP65 IP65	IK 08		 ECODESIGN COMPLIANT	 CE	RoHS	Ta -20° +45°C
--------------	---	------------	--------------	----------	---	--	--	------	------------------

(W) White Reflector



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0110W-927	10W	2700 K	92	2405 lm	on-off
RCD0110W-927	10W	2700 K	92	2405 lm	DALI
RC0110W-930	10W	3000 K	92	2504 lm	on-off
RCD0110W-930	10W	3000 K	92	2504 lm	DALI
RC0110W-940	10W	4000 K	92	2538 lm	on-off
RCD0110W-940	10W	4000 K	92	2538 lm	DALI

(B) Matt Black Reflector




cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0110B-927	10W	2700 K	92	2405 lm	on-off
RCD0110B-927	10W	2700 K	92	2405 lm	DALI
RC0110B-930	10W	3000 K	92	2504 lm	on-off
RCD0110B-930	10W	3000 K	92	2504 lm	DALI
RC0110B-940	10W	4000 K	92	2538 lm	on-off
RCD0110B-940	10W	4000 K	92	2538 lm	DALI

(S) Shiny Silver Reflector



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
RC0110S-927	10W	2700 K	92	2103 lm	on-off
RCD0110S-927	10W	2700 K	92	2103 lm	DALI
RC0110S-930	10W	3000 K	92	2504 lm	on-off
RCD0110S-930	10W	3000 K	92	2504 lm	DALI
RC0110S-940	10W	4000 K	92	2538 lm	on-off
RCD0110S-940	10W	4000 K	92	2538 lm	DALI



RECESSED CEILING LIGHT

LUA LED



Die-cast aluminum body.

- UV-stabilized anti-yellowing varnish.
- Anti-glare polycarbonate diffuser.
- UGR <19

• Built in compliance with standards
EN 60598-1 and EN 60598-2-2.

SOURCE

- LED module with nominal efficiency up to 150 lumen / Watt
- Rated LED life: > 48000h with L70.
- CRI > 80 / CRI > 90

INSTALLATION


- Recessed installation.
- Fixing with steel springs.

These devices are designed for modern control systems.

For the different possibilities see the section "Light control".

DIMENSIONS

- 30W: front Ø230 mm x H.76 mm, hole Ø210 mm
- 20W: front Ø230 mm x H.76 mm, hole Ø210 mm

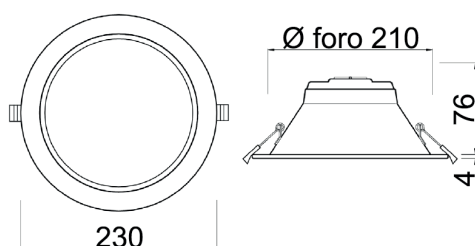

RoHS



Recessed Ceiling Light



LUA LED 30W



(W) White Diffuser - Anti-glare Optic



cod.	WATT	C.C.T. selezionabile	CRI	LIGHT SOURCE	FUNCTION
RC1030W-CCT	30W	3000K/4000K/6000K	80	3900 lm	on-off
RCD1030W-CCT	30W	3000K/4000K/6000K	80	3900 lm	DALI

LUA LED 20W



(W) White Difuser - Anti-glare Optic



cod.	WATT	C.C.T. selezionabile	CRI	LIGHT SOURCE	FUNCTION
RC1020W-CCT	20W	3000K/4000K/6000K	80	2630 lm	on-off
RCD1020W-CCT	20W	3000K/4000K/6000K	80	2630 lm	DALI

Surface Mounting Ceiling Light

LAPIS LED



- Aluminum body.
- UV-stabilized anti-yellowing powder coating.
- Interchangeable metallized polycarbonate reflectors.
- Item built in compliance with standards EN 60598-1 and EN 60598-2-1.

SOURCE

- COB LED with nominal efficiency up to 135 lumen / Watt (4000K - 270mA - CRI > 92 - Tj = 85 ° C).
- Rated LED life: > 50000h with L70.
- Selection: <3 SDCM.

INSTALLATION

- Ceiling or suspended installation.
- Fixing base in painted metal -.

These devices are designed for modern control systems.
For the different possibilities see the section "Light control".

DIMENSIONS

- Ø102 x H.110mm

Surface Mounting Ceiling Light

LAPIS LED

12W

220V 240V	UGR <16	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	------------	--------------	------	--	------------------------	----	------	------------------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0212LW-927	12W	2700 K	92	1526 lm	on-off
CED0212LW-927	12W	2700 K	92	1526 lm	DALI
CE0212LW-930	12W	3000 K	92	1590 lm	on-off
CED0212LW-930	12W	3000 K	92	1590 lm	DALI
CE0212LW-940	12W	4000 K	92	1611 lm	on-off
CED0212LW-940	12W	4000 K	92	1611 lm	DALI

(B) Matt Black reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0212LB-927	12W	2700 K	92	1526 lm	on-off
CED0212LB-927	12W	2700 K	92	1526 lm	DALI
CE0212LB-930	12W	3000 K	92	1590 lm	on-off
CED0212LB-930	12W	3000 K	92	1590 lm	DALI
CE0212LB-940	12W	4000 K	92	1611 lm	on-off
CED0212LB-940	12W	4000 K	92	1611 lm	DALI

ACCESSORIES



cod. REF012-S
(S) Shiny Silver Reflector



cod. REF012-G
(G) Shiny Gold Reflector



cod. LEN012-N
(N) 15° Lens



cod. LEN012-S
(S) 24° Lens



cod. LEN012-M
(L) 36° Lens



cod. SUS001
Suspension cable

Adjustable Surface Mounting Ceiling Light



AKIS LED

- Available in two versions, for ceiling and track installation.
- Adjustable head, 90 ° on the vertical axis and 320 ° on the horizontal one.
- Aluminum body.
- UV-stabilized anti-yellowing powder coating.
- Interchangeable metallized polycarbonate reflectors.
- Item built in compliance with standards EN 60598-1 and EN 60598-2-1.

SOURCE

- Selectable white color temperature 2700/4000 / 6000K
- COB LED with luminous efficiency.
- Rated LED life:> 50000h with L70.
- Selection: <6 SDCM.


INSTALLATION

- Ceiling or electrified track installation.
- Fixing base in painted metal.

These devices are designed for modern control systems.
For the different possibilities see the section "Light control".

DIMENSIONS

- Ø100 x H.108mm

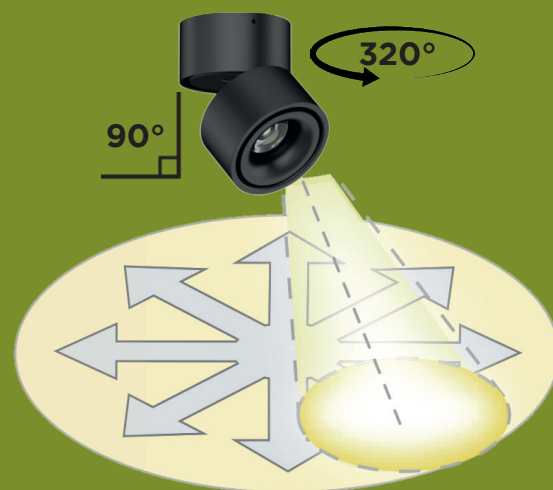

Adjustable Surface Mounting Ceiling Light

AKIS LED

15W - CCT

220V 240V	UGR <16	IP20 IP44	IK05		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	------------	--------------	------	--	------------------------	----	------	------------------

(W) White Reflector - 36° Standard Optic




cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0215MW-TW	15W	2700-4000-6000 K	>80	1350 - 1550 lm	on-off
CED0215MW-TW	15W	2700-4000-6000 K	>80	1350 - 1550 lm	TRIAC dim.

(B) Matt Black reflector - 36° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0215MB-TW	15W	2700-4000-6000 K	>80	1350 - 1550 lm	on-off
CED0215MB-TW	15W	2700-4000-6000 K	>80	1350 - 1550 lm	TRIAC dim.



ACCESSORIES



cod. REF015-G
(G) Shiny Gold Reflector



cod. LEN012-N
(N) 20° Lens



cod. SUS001
Suspension Cable

Surface Mounting Ceiling Light

SUI LED



Surface Mounting Ceiling Light



- Aluminum body.
- UV-stabilized anti-yellowing powder coating.
- Interchangeable metallized polycarbonate reflectors.
- Item built in compliance with standards EN 60598-1 and EN 60598-2-1.

SOURCE

- COB LED with nominal efficiency up to 135 lumen / Watt (4000K - 270mA - CRI> 92 - Tj = 85 ° C).
- Rated LED life:> 50000h with L70.
- Selection: <3 SDCM.

INSTALLATION

- Ceiling or suspended installation.
 - Fixing base in painted metal -.
- These devices are designed for modern control systems.
For the different possibilities see the section "Light control".

DIMENSIONS

- 12W: L.108 x W.108 x H.110mm
- 2x12W: L.202 x W.108 x H.110mm
- 3x12W: L.298 x W.108 x H.110mm
- 4x12W: L.202 x W.202 x H.110mm

Surface Mounting Ceiling Light

SUI LED

12W

220V 240V	UGR <16	IP20 IP44	IK07		ECODESIGN COMPLIANT		RoHS	Ta -20° +45°C
--------------	------------	--------------	------	--	------------------------	--	------	------------------

(W) White Reflector - 60° Standard Optic

	cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
	CE0112LW-927	12W	2700 K	92	1526 lm	on-off
	CED0112LW-927	12W	2700 K	92	1526 lm	DALI
	CE0112LW-930	12W	3000 K	92	1590 lm	on-off
	CED0112LW-930	12W	3000 K	92	1590 lm	DALI
	CE0112LW-940	12W	4000 K	92	1611 lm	on-off
	CED0112LW-940	12W	4000 K	92	1611 lm	DALI

(B) Matt Black reflector - 60° Standard Optic

	cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
	CE0112LB-927	12W	2700 K	92	1526 lm	on-off
	CED0112LB-927	12W	2700 K	92	1526 lm	DALI
	CE0112LB-930	12W	3000 K	92	1590 lm	on-off
	CED0112LB-930	12W	3000 K	92	1590 lm	DALI
	CE0112LB-940	12W	4000 K	92	1611 lm	on-off
	CED0112LB-940	12W	4000 K	92	1611 lm	DALI

ACCESSORIES



cod. REF012-S
(S) Shiny Silver Reflector



cod. REF012-G
(G) Shiny Gold Reflector



cod. LEN012-S
(N) 15° Lens



cod. LEN012-N
(S) 24° Lens



cod. LEN012-M
(M) 36° Lens



cod. SUS001
Suspension Cable

Surface Mounting Ceiling Light

SUI LED

2 x 12W

220V 240V	UGR <16	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	------------	--------------	------	--	------------------------	----	------	------------------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0124LW-927	24W	2700 K	92	2 x 1526 lm	on-off
CED0124LW-927	24W	2700 K	92	2 x 1526 lm	DALI
CE0124LW-930	24W	3000 K	92	2 x 1590 lm	on-off
CED0124LW-930	24W	3000 K	92	2 x 1590 lm	DALI
CE0124LW-940	24W	4000 K	92	2 x 1611 lm	on-off
CED0124LW-940	24W	4000 K	92	2 x 1611 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0124LB-927	24W	2700 K	92	2 x 1526 lm	on-off
CED0124LB-927	24W	2700 K	92	2 x 1526 lm	DALI
CE0124LB-930	24W	3000 K	92	2 x 1590 lm	on-off
CED0124LB-930	24W	3000 K	92	2 x 1590 lm	DALI
CE0124LB-940	24W	4000 K	92	2 x 1611 lm	on-off
CED0124LB-940	24W	4000 K	92	2 x 1611 lm	DALI

ACCESSORIES



cod. REF012-S
(S) Shiny Silver Reflector



cod. REF012-G
(G) Shiny Gold Reflector



cod. LEN012-S
(N) 15° Lens



cod. LEN012-N
(S) 24° Lens



cod. LEN012-M
(M) 36° Lens



cod. SUS001
Suspension Cable

Surface Mounting Ceiling Light

SUI LED

3 x 12W

220V 240V	UGR <16	IP20 IP44	IK07					Ta -20° +45°C
--------------	------------	--------------	------	---	---	---	---	------------------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0136LW-927	36W	2700 K	92	3 x 1526 lm	on-off
CED0136LW-927	36W	2700 K	92	3 x 1526 lm	DALI
CE0136LW-930	36W	3000 K	92	3 x 1590 lm	on-off
CED0136LW-930	36W	3000 K	92	3 x 1590 lm	DALI
CE0136LW-940	36W	4000 K	92	3 x 1611 lm	on-off
CED0136LW-940	36W	4000 K	92	3 x 1611 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0136LB-927	36W	2700 K	92	3 x 1526 lm	on-off
CED0136LB-927	36W	2700 K	92	3 x 1526 lm	DALI
CE0136LB-930	36W	3000 K	92	3 x 1590 lm	on-off
CED0136LB-930	36W	3000 K	92	3 x 1590 lm	DALI
CE0136LB-940	36W	4000 K	92	3 x 1611 lm	on-off
CED0136LB-940	36W	4000 K	92	3 x 1611 lm	DALI

ACCESSORIES



cod. REF012-S
(S) Shiny Silver Reflector



cod. REF012-G
(G) Shiny Gold Reflector



cod. LEN012-S
(N) 15° Lens



cod. LEN012-N
(S) 24° Lens



cod. LEN012-M
(M) 36° Lens



cod. SUS001
Suspension Cable

Surface Mounting Ceiling Light

SUI LED

4 x 12W

220V 240V	UGR <16	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	------------	--------------	------	--	------------------------	----	------	------------------

(W) White Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0148LW-927	48W	2700 K	92	4 x 1526 lm	on-off
CED0148LW-927	48W	2700 K	92	4 x 1526 lm	DALI
CE0148LW-930	48W	3000 K	92	4 x 1590 lm	on-off
CED0148LW-930	48W	3000 K	92	4 x 1590 lm	DALI
CE0148LW-940	48W	4000 K	92	4 x 1611 lm	on-off
CED0148LW-940	48W	4000 K	92	4 x 1611 lm	DALI

(B) Matt Black Reflector - 60° Standard Optic



cod.	WATT	C.C.T.	CRI	LIGHT SOURCE	FUNCTION
CE0148LB-927	48W	2700 K	92	4 x 1526 lm	on-off
CED0148LB-927	48W	2700 K	92	4 x 1526 lm	DALI
CE0148LB-930	48W	3000 K	92	4 x 1590 lm	on-off
CED0148LB-930	48W	3000 K	92	4 x 1590 lm	DALI
CE0148LB-940	48W	4000 K	92	4 x 1611 lm	on-off
CED0148LB-940	48W	4000 K	92	4 x 1611 lm	DALI

ACCESSORIES



cod. REF012-S
(S) Shiny Silver Reflector



cod. REF012-G
(G) Shiny Gold Reflector



cod. LEN012-S
(N) 15° Lens



cod. LEN012-N
(S) 24° Lens



cod. LEN012-M
(M) 36° Lens



cod. SUS001
Suspension Cable



PrimOtek s.r.l.s.
via Primo Maggio, 19
25013 Carpenedolo (BS) Italy Ph +39 0302389856
www.primotek.it - info@primotek.it