



**LED strip selection**

**LED profile collection**

**LED professional lighting**





PrimoLUX, the lighting division of PrimOtek, a dynamic and constantly growing company, with thirty years of experience, able to offer over the time a complete range of lighting engineering and light control solutions. Continuous commitment to research and development and accurate control of the whole production process. From the design of the product to its realization up to its use in the most sophisticated creations. The mix of specialist skills, innovation and attention to detail are the goals of the company, this brings into elegant and functional design products, able to satisfy the most demanding technical and aesthetic needs of any project. All the products of the PrimoLux line by PrimOtek are made using the most modern technologies and with the highest quality components that guarantee reliability and efficiency over time.



## Not only strips and profiles


Always present in the world of lighting and attentive to market innovations, our production experience over the years side by side with designers, planners, installers and customers allows us today to design and implement complete lighting solutions with our products. 100% open to listening to the needs of our customers in order to give a complete solution to their lighting idea. In this catalog we present some solutions for the creation of architectural lighting. PrimOlux with its Tailor Made service is ready to introduce new geometric shapes suitable to customer needs with different powers and brightness.





## OUR STRIPS

PrimOlux presents the new range of LED strips LINYA. Studied and optimized taking into consideration the best technologies on the market, starting from a careful selection of components such as LED Chips and flexible copper card, arriving to the creation of four families:  
LINYA 230V, LINYA SMD, LINYA COB, LINYA RGB+W.




### LINYA 230V

High efficiency LED strip and Flicker FREE, powered by main voltage in the 220-240V range. Mechanical insulation protection suitable for the operating voltage, IP65, compatible with the current Eco Design 2019/2020 directive.

LINYA 230V offers considerable advantages in various applications such as the need for considerably long stretches.

Dimmable in phase cut, it is offered in reels of 5 and 50 meters with a choice of color temperatures of 3000K and 4000K.



### LINYA SMD

LED strip with high luminous efficiency up to 145 lm/W, powered at 24Vdc. Mechanical protection insulation suitable for the operating voltage, IP65 and IP20, compatible with the current Eco Design directive 019/2020.

High color rendering (CRI>90), high brightness and high LED/m density are the essential characteristics of LINYA SMD. Dimmable with all the devices proposed in the "Light Controls" section of PrimOlux. Available in reels of 5 and 20 meters to avoid waste during installation. The choice of color temperature proposed is 2700K, 3000K and 4000K.



### LINYA COB

COB LED strip with very high density of LED Chips, up to 480 LED/m (continuous line effect). This guarantees an excellent uniformity of light emission becoming a decorative effect even in aluminum profiles with transparent diffuser, thus avoiding the normal dispersion of light of opal diffusers and allows to hide the pixel effect. Mechanical insulation protection suitable for the operating voltage, IP65 and IP20, compatible with the current Eco Design 2019/2020 directive.

Excellent quality of light, color rendering (CRI>90), high brightness and very high LED/m density are the excellent characteristics of LINYA COB. Dimmable with all the devices proposed in the "Light Controls" section of PrimOlux. Available in reels of 5 and 20 meters to avoid waste during installation. The choice of color temperature proposed is 2700K, 3000K and 4000K.



### LINYA RGB+W


RGB+W LED strip with its 240 LEDs per meter is the careful result of a lighting engineering study that led to an optimal result for both colored and white lighting. Each meter of LINYA RGB+W is made up of 240 LEDs, therefore 120 groups formed by a 2835 RGB 3in1 LED with flanked by a pure white 2216 LED. The advantage of this composition, in addition to the high density of LEDs/m, is the lower risk of overheating of the chips inside the body itself and consequently a constant light output of the four colours. LINYA RGB+W guarantees perfect color mixing with the possibility of emitting white light with different shades of white by interacting between the white LED on at 100% and the inclusion of Blue+Green to raise the color temperature. For the sag will need to enter Red and Green for saturation. Mechanical insulation protection suitable for the operating voltage, IP65 and IP20. Compatible with the current Eco Design 2019/2020 directive. LINYA RGB+W can be controlled with all the proposed RGBW devices in the "Light Controls" section of PrimOlux.

LED Flexible STRIP

# LINYA LED 230V

## IP65 - Flicker FREE

High efficiency LED strip and Flicker FREE, powered by mains voltage in the 220-240V range. Mechanical insulation protection suitable for the operating voltage, IP65, compatible with the current Eco Design 2019/2020 directive. LINYA 230V offers considerable advantages in many applications such as the need for considerably long stretches. Dimmable in phase cut is proposed in reels of 5 and 50 meters with a choice of color temperatures of 3000K and 4000K.






LED Flexible STRIP

# LINYA LED 230V

Flicker FREE - CRI>80 - IP65



- SMD2835 led strips
- 104 led/m
- Opening angle 120°
- Dimmable
- IP65
- Bending diameter >6cm
- Minimum cut 25 cm
- 3M adhesive tape for fixing
- Connection cable
- EcoDesign compatible

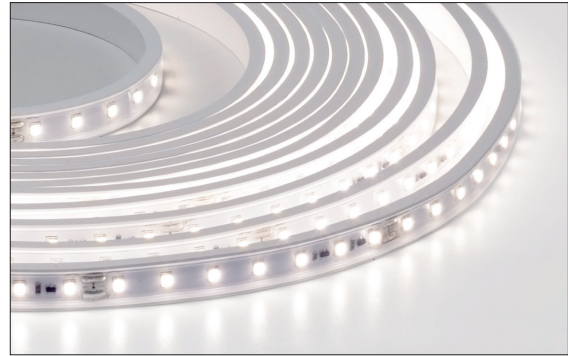

## CRI>80 / 12W/m - IP65 - 5 mt

Dimmable

5 mt Reel



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST9105H12-840	4000 K	12 W	>80	1060 lm	104	220-240 V
ST9105H12-830	3000 K	12 W	>80	1100 lm	104	220-240 V



25 cm minimum cut  
Ø 6 cm bending



cod. CONHS310  
power connector



cod. TAPHS110  
end cap

± 5 mm


## CRI>80 / 12W/m - IP65 - 50 mt

Dimmable

50 mt Reel



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST9150H12-840	4000 K	12 W	>80	1060 lm	104	220-240 V
ST9150H12-830	3000 K	12 W	>80	1100 lm	104	220-240 V



25 cm minimum cut  
Ø 6 cm bending



cod. CONHS310  
power connector



cod. TAPHS110  
end cap


± 5 mm



LED Flexible STRIP

# LYNIA smd LED

Lynia uses high selection SMD 2835 LEDs. With their chromatic rendering index, these guarantee a quality of light that respects the tonality of the colors displayed, high luminous rendering with homogeneity of flux and duration over time. All models are available in three different color temperatures, 4000K, 3000K and 2700K. The small size allows Lynia to be installed in minimal profiles for the creating light effects of modern design. Lynia is available in two lengths, the classic 5 meters and the more convenient 20 meters which allows to save money during the installation phase by avoiding waste and remaining pieces.

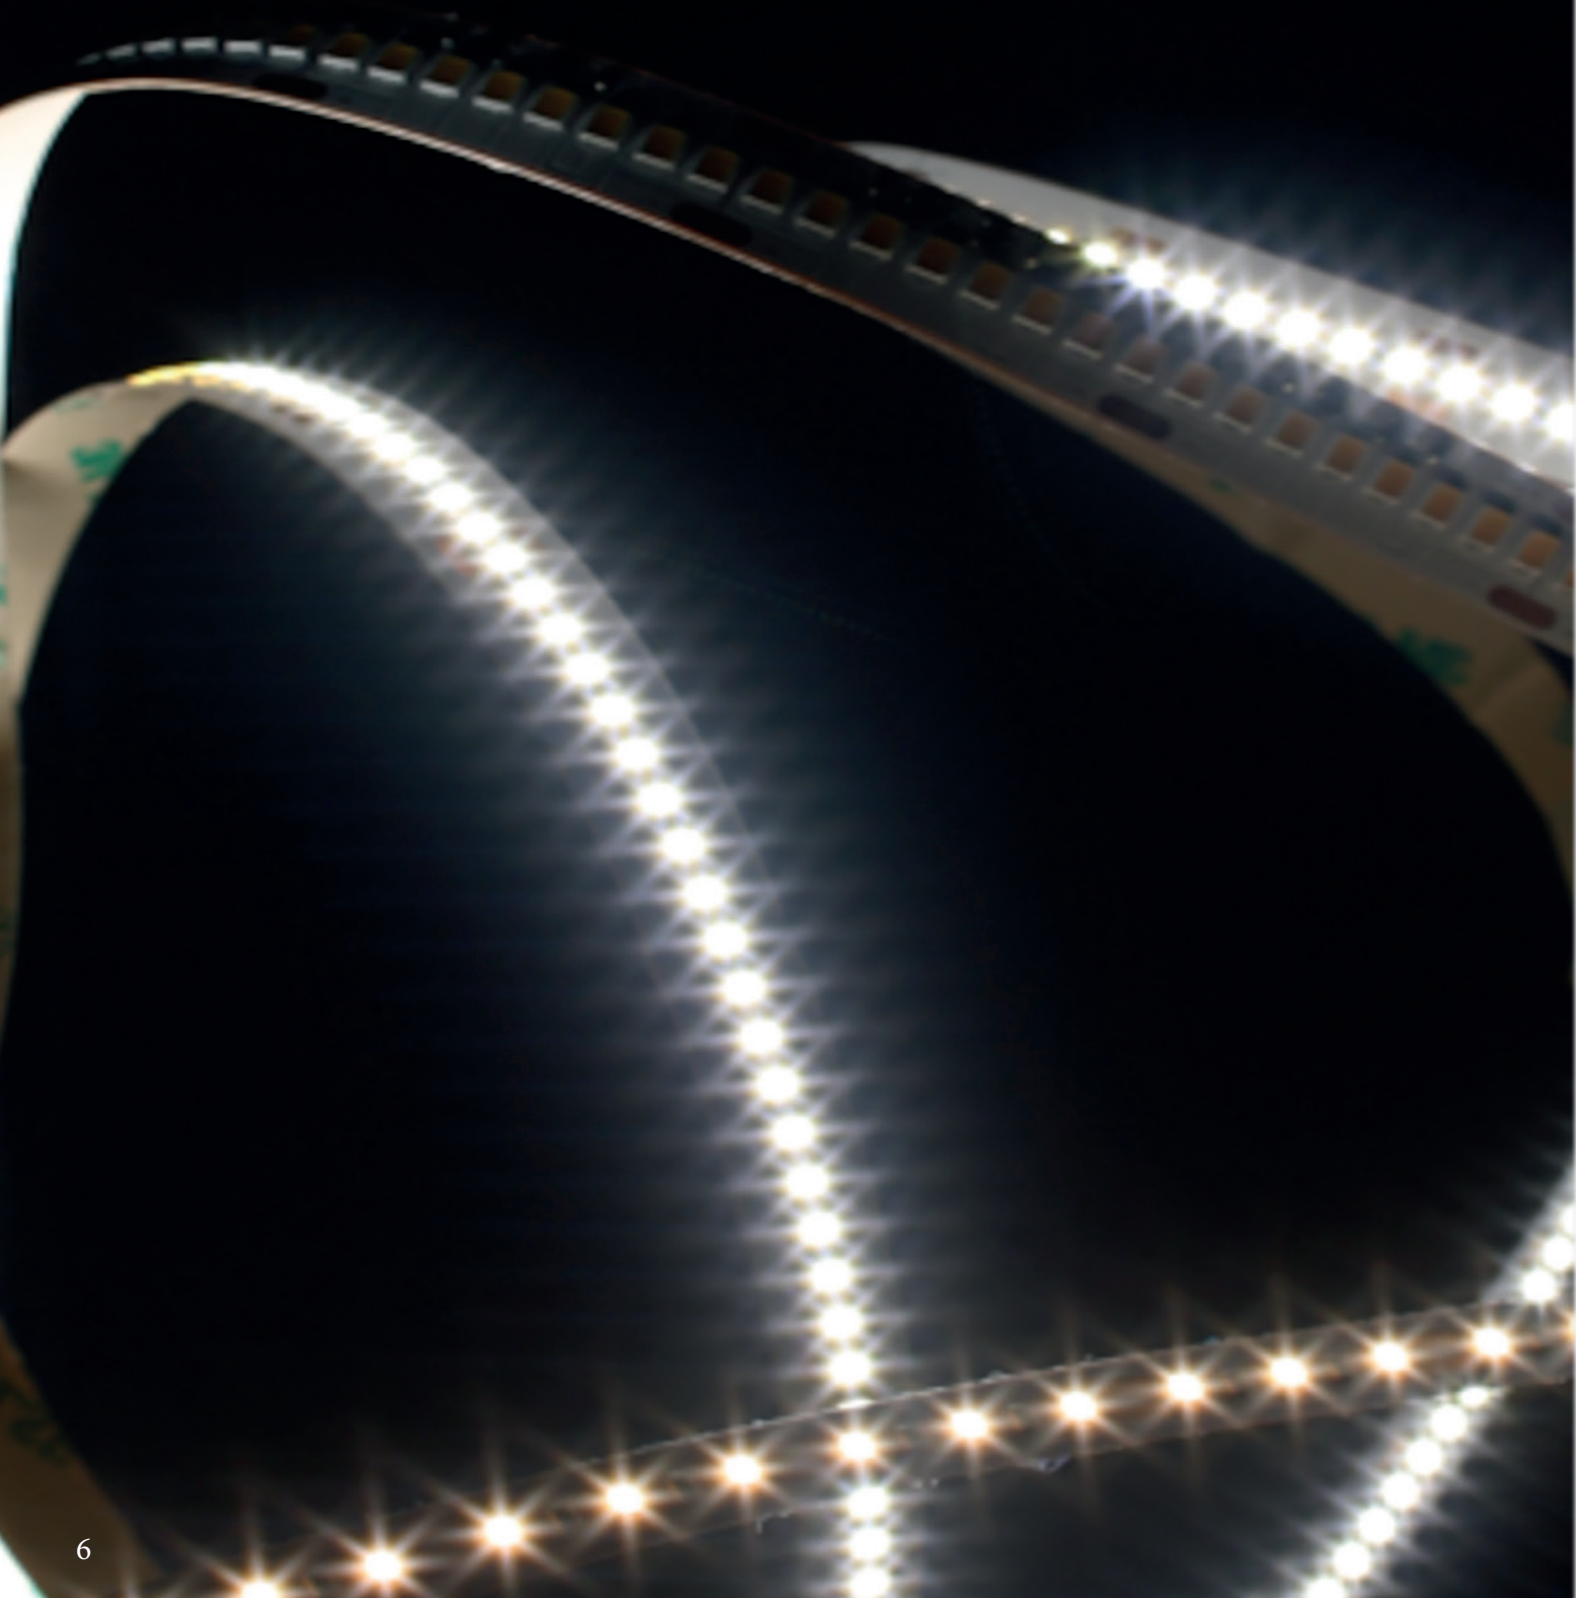



LED Flexible STRIP

# LINYA SMD LED IP20

## 18W/m - CRI>90 - 24Vdc - 192 LED/m




- SMD2835 led strips
- Opening angle 120°
- Dimmable
- IP20
- Bending Ø >10cm
- Minimum cut 4.17 cm
- 3M adhesive tape for fixing
- Connection cable
- Linear connection Max 5 mt
- EcoDesign compatible




### CRI>90 - 18W/m - 192 LED/m - IP20 - 5 mt

Dimmable



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST1A052418-940	4000 K	18 W	>90	2290 lm	192	24 Vdc
ST1A052418-930	3000 K	18 W	>90	2200 lm	192	24 Vdc



4.17 cm minimum cut  
 Max 5 mt linear connection  
 Ø 10 cm bending



cod. CON2S110  
 straight quick  
 connector



cod. CON2S310  
 power connector




cod. CON2S510  
 Double connector


± 1,5mm

### CRI>90 - 18W/m - 192 LED/m - IP20 - 20 mt

Dimmable



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST1A202418-940	4000 K	18 W	>90	2290 lm	192	24 Vdc
ST1A202418-930	3000 K	18 W	>90	2200 lm	192	24 Vdc



4.17 cm minimum cut  
 Max 5 mt linear connection  
 Ø 10 cm bending



cod. CON2S110  
 straight quick  
 connector



cod. CON2S310  
 Power connector



cod. CON2S510  
 Double connector

± 1,5mm

LED Flexible STRIP

# LINYA LED IP20

22W/m - CRI>90 - 24Vdc- 238 LED/m




- SMD2835 led strips
- Opening angle 120°
- Dimmable
- IP20
- Bending Ø >10cm
- Minimum cut 5 cm
- 3M adhesive tape for fixing
- Connection cable
- Linear connection Max 5 mt
- EcoDesign compatible




## CRI>90 - 22W/m - 238 LED/m - IP20 - 5 mt

Dimmable



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST1A052422-940	4000 K	22 W	>90	2850 lm	238	24 Vdc
ST1A052422-930	3000 K	22 W	>90	2720 lm	238	24 Vdc



2.94 cm minimum cut  
Max 5 mt linear connection  
Ø 10 cm bending



cod. CON2S110  
straight quick  
connector




cod. CON2S310  
Power connector




cod. CON2S510  
Double connector

## CRI>90 - 22W/m - 238 LED/m - IP20 - 20 mt

Dimmable



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST1A202422-940	4000 K	22 W	>90	2850 lm	238	24 Vdc
ST1A202422-930	3000 K	22 W	>90	2720 lm	238	24 Vdc



2.94 cm minimum cut  
Max 5 mt linear connection  
Ø 10 cm bending



cod. CON2S110  
straight quick  
connector



cod. CON2S310  
Power connector



cod. CON2S510  
Double Connector



LED Flexible STRIP

# LINYA LED IP66

## 14.4W/m - 19.2W/m - CRI>90 - 24Vdc




- SMD2835 led strips
- Opening angle 120°
- Dimmable
- IP66
- Bending Ø >10cm
- Minimum cut 6.25 cm (14.4W/m)
- Minimum cut 5 cm (19.2W/m)
- 3M adhesive tape for fixing
- Connection cable
- Linear connection Max 5 mt
- EcoDesign compatible




### CRI>90 - 14.5W/m - IP66 - 5 mt

Dimmable



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST11052414-940	4000 K	14.4 W	>90	2088 lm	128	24 Vdc
ST11052414-930	3000 K	14.4 W	>90	2044 lm	128	24 Vdc




5 cm minimum cut  
 Max 5 mt linear connection  
 Ø 10 cm bending




### CRI>90 - 19.2W/m - IP66 - 5 mt

Dimmable



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST10052414-940	4000 K	14.4 W	>90	2784 lm	128	24 Vdc
ST10052414-930	3000 K	14.4 W	>90	2650 lm	128	24 Vdc



5 cm minimum cut  
 Max 5 mt linear connection  
 Ø 10 cm bending





LED Flexible STRIP

# LYNIA COB LED

Lynia is a professional IP20 and IP65 COB LED strip series.

The COB LED strips allow to create homogeneous lines of light without the classic dotted effect and offer a wide 180° diffusion angle both with profiles without diffuser and with transparent covers. CRI>90 / CRI95 in all color temperatures, 4000K, 3000K and 2700K. Small dimensions that allow installation in smaller profiles than traditional strips. This gives the possibility to create lighting effects of modern design and at the same time lighting uniformity. Available in two lengths, the classic 5 meters and the more convenient 20 meters which allows to save money during the installation phase by avoiding waste and remaining pieces.






LED Flexible STRIP

# LINYA COB LED IP20

## 8W/m - CRI>90 - 24Vdc




- COB led strips
- Opening angle 180°
- Dimmable
- IP20
- Bending Ø >10cm
- Minimum cut 5 cm
- 3M adhesive tape for fixing
- Connection cable
- Linear connection Max 5 mt
- EcoDesign compatible

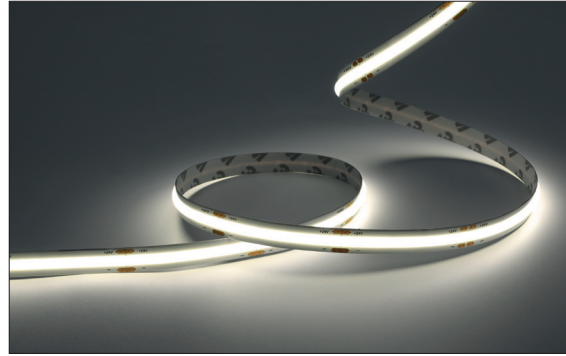

### CRI>90 - 8W/m - IP20 - 5 mt

Dimmable

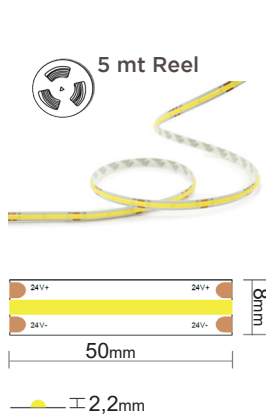

cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST00052408-940	4000 K	8 W	>90	840 lm	320	24 Vdc
ST00052408-930	3000 K	8 W	>90	760 lm	320	24 Vdc
ST00052408-927	2700 K	8 W	>90	760 lm	320	24 Vdc

5 cm minimum cut  
Max 5 mt linear connection  
Ø 10 cm bending



cod. **CON1S18**  
Straight quick  
connector



cod. **CON1S38**  
Power connector




cod. **CON1S28**  
"L" quick connector



cod. **CON1S58**  
Double Connector

### CRI>90 - 8W/m - IP20 - 20 mt

Dimmable

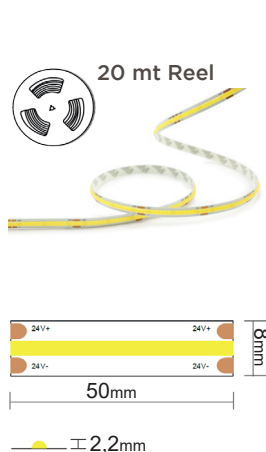

cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST00202408-940	4000 K	8 W	>90	840 lm	320	24 Vdc
ST00202408-930	3000 K	8 W	>90	760 lm	320	24 Vdc
ST00202408-927	2700 K	8 W	>90	760 lm	320	24 Vdc

5 cm minimum cut  
Max 5 mt Linear connection  
Ø 10 cm bending



cod. **CON1S18**  
Straight quick  
Connector



cod. **CON1S38**  
Power connector



cod. **CON1S28**  
"L" quick connector



cod. **CON1S58**  
Double Connector


LED Flexible STRIP

# LINYA COB LED IP20

## 15W/m - CRI>90 - 24Vdc




- COB led strips
- Opening angle 180°
- Dimmable
- IP20
- Bending Ø >10cm
- Minimum cut 5 cm
- 3M adhesive tape for fixing
- Connection cable
- Linear connection Max 5 mt
- EcoDesign compatible

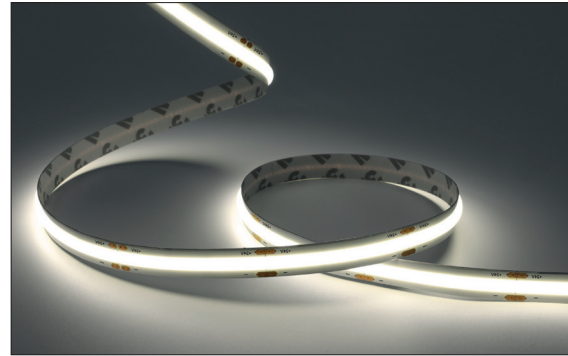

### CRI>90 - 15W/m - IP20 - 5 mt

Dimmable

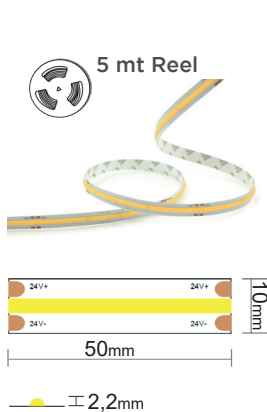

cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST00052415-940	4000 K	15 W	>90	1440 lm	480	24 Vdc
ST00052415-930	3000 K	15 W	>90	1440 lm	480	24 Vdc
ST00052415-927	2700 K	15 W	>90	1350 lm	480	24 Vdc

5 cm minimum cut  
Max 5 mt Linear connection  
Ø 10 cm bending



cod. CON1S110  
Straight quick  
Connector



cod. CON1S310  
Power connector




cod. CON1S210  
"L" quick connector



cod. CON1S510  
Double Connector

### CRI>90 - 15W/m - IP20 - 20 mt

Dimmable

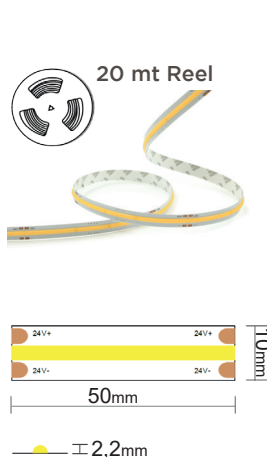

cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST00202415-940	4000 K	15 W	>90	1440 lm	480	24 Vdc
ST00202415-930	3000 K	15 W	>90	1440 lm	480	24 Vdc
ST00202415-927	2700 K	15 W	>90	1350 lm	480	24 Vdc

5 cm minimum cut  
Max 5 mt linear connection  
Ø 10 cm bending



cod. CON1S110  
Straight quick  
Connector



cod. CON1S310  
Power connector



cod. CON1S210  
"L" quick connector



cod. CON1S510  
Double Connector




LED Flexible STRIP

# LINYA COB LED IP65

8W/m - 15W/m - CRI>90 - 24Vdc




- COB led strips
- Opening angle 180°
- Dimmable
- IP65
- Self-adherent protection
- Bending Ø >10cm
- Minimum cut 5 cm
- 3M adhesive tape for fixing
- Connection cable
- Linear connection Max 5 mt
- EcoDesign compatible

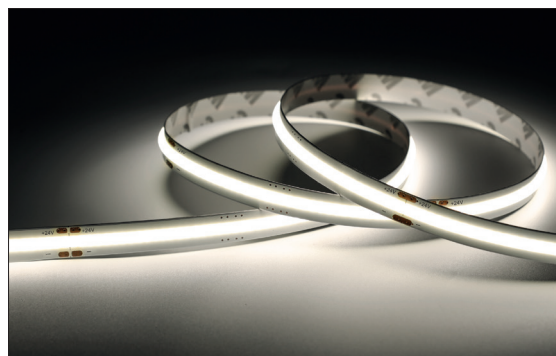


## CRI>90 - 8W/m - IP65 - 5 mt

Dimmable




cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST01052408-940	4000 K	8 W	>90	840 lm	320	24 Vdc
ST01052408-930	3000 K	8 W	>90	760 lm	320	24 Vdc
ST01052408-927	2700 K	8 W	>90	760 lm	320	24 Vdc




5 cm minimum cut  
Max 5 mt linear connection  
Ø 10 cm bending

## CRI>90 - 15W/m - IP65 - 5 mt

Dimmable



cod.	C.C.T.	W/m	CRI	lm/m	LED/m	Volt
ST01052415-940	4000 K	15 W	>90	1440 lm	480	24 Vdc
ST01052415-930	3000 K	15 W	>90	1440 lm	480	24 Vdc
ST01052415-927	2700 K	15 W	>90	1350 lm	480	24 Vdc



5 cm minimum cut  
Max 5 mt linear connection  
Ø 10 cm bending



# LINYA LED RGB+W





LED Flexible STRIP

# LINYA LED RGB+W


## 20W/m - 24Vdc - 240 LED/m - IP20 - IP65

- SMD 2832+ led strips
- 240 led/m
- Opening angle 120°
- Dimmable
- IP65
- Bending diameter >6cm
- Minimum cut 25 cm
- 3M adhesive tape for fixing
- Connection cable
- EcoDesign compatible



### RGBW / 20W/m - IP20 - 5 mt - 24 Vdc

Mixing color -Dimmable



2 mm

24V	IP20		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
-----	------	--	---------------------	----	------	------------------


cod.	W/m	red	green	blue	white	LED/m	lumen
ST00052420-RGBW	20	610-630nm	515-525nm	460-470nm	3000K	240	950


 cod. CON5S310-R  
 RGBW power connection

 cod. CON5S110-R  
 RGBW quick joint

### RGBW / 20W/m - IP65 - 5 mt - 24 Vdc

Mixing color - Dimmable



2 mm

24V	IP65		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
-----	------	--	---------------------	----	------	------------------

cod.	W/m	rosso	verde	blu	bianco	LED/m	lumen
ST10052420-RGBW	20	610-630nm	515-525nm	460-470nm	3000K	240	950


 cod. CON5S310-R  
 RGBW power connection

 cod. CON5S110-R  
 RGBW quick joint

# Aluminium LED profile

Professional series of aluminum profiles of different geometries for the creation of supports for the installation of the strips inside them. The whole series offers all the accessories such as diffusers with different treatments, caps and fixing clips.

Unique shapes of triangular square, round and special shapes design.

Quick and easy installation thanks to the accessories.

High quality anti-yellowing diffusers.

AL6063-T5 aircraft aluminum with excellent heat dissipation.

Minimum anodizing based on 15/20 micron models.

Diffusers in flame retardant PC or PMMA (UL: UL94V-2).

Optional diffusers with sizes up to 50 meters to ensure uniform installation.

The whole series of aluminum profiles can be used for both SMD and COB strips.

The wide range allows installation in furniture, furnishing accessories, decorative and recessed lighting veils.


## TAILOR MADE Custom strips and profiles



Custom profiles and strips.

Upon request, it is possible to purchase lots of profiles cut to size with the strip already installed with

LED inside complete with accessories and connection cable. This custom service is to be agreed at the order.

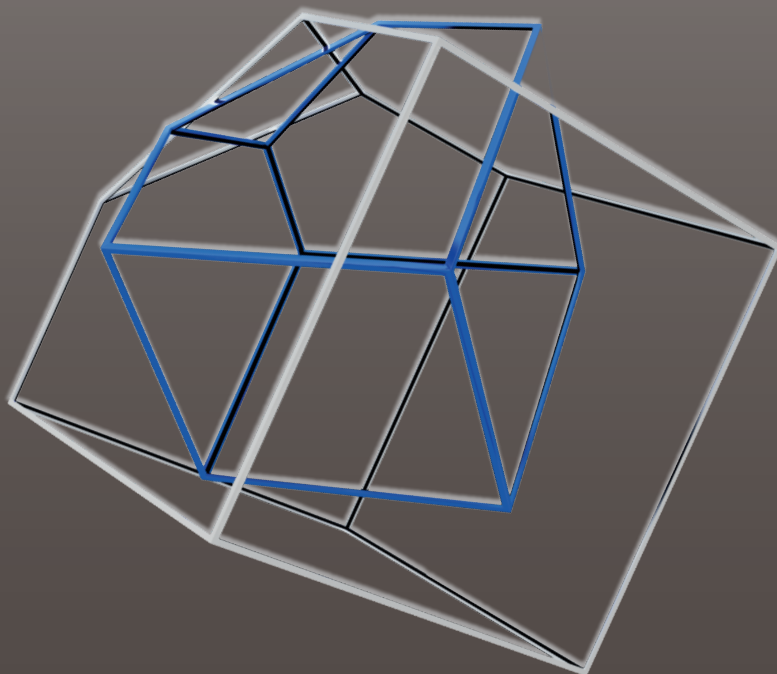

## FAST SELECTION

PrimOlux has selected for this catalog a series of profiles that satisfy the four most frequent types of installation, surface, suspension, recessed and adjustable. In addition to the Fast selection, PrimOlux is able to supply dozens of other models for design applications and with different construction features. Staff specialized in lighting design and pre- and post-sales service will help you select the right profile if this selection is not enough.

## SURFACE /CEILING/ WALL

### S7 MINI SLIM

surface, ciling and wall



cod. PA1407  
Pag. 4

### S15 REGULAR

surface



cod. PA1715  
Pag. 5

### S9 WIDE SLIM

surface, ceiling, wall



cod. PA2208  
Pag. 6

### T16 CORNER

surfance, ceiling, wall




cod. PA1616  
Pag. 7

## SUSPENSION /CEILING

### S35 SQUARE


surface, ceiling, wall or suspension



cod. PA3535  
Pag. 8

### S55 DOUBLE 70x55

surface, ceiling, wall suspension



cod. PA7055  
Pag. 9

## SUSPENSION / CEILING/ ADJUSTABLE

### T24 ROUND

surface, ceiling, wall or suspension



cod. PA2424  
Pag. 10

## RECESSED /RETRACTABLE

### R7 SLIM RECESSED

walkable recessed



cod. PA2405i  
Pag. 11

### R18 I WIDE RECESSED CEILING


ceiling recessed with springs



cod. PA4318i  
Pag. 12

### TR14 INCASSO A SCOMPARSA

flush recessed plasterboard



cod. PA6214i  
Pag. 13



## Professional Aluminium LED Profile

# S7 MINI SLIM

surface, ceiling and wall



**SURFACE IN-  
STALLATION**




**MAX. DISSIPATION**  
15 W/m



**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable


S7 is an extremely versatile mini profile in anodized aluminum. It can be used on any surface but thanks to its flat diffuser it can also be used recessed without visible edges. S7 allows to create a thin line of light that highlights all the illuminated environments with style. Possibility of customizing the profiles complete with LED strips inside them, power cable and fixing accessories.




unit.: mm



### THE STANDARD PACKAGE INCLUDES:

- 1 2 m aluminium profile
- 1 diffusore L.2 m
- 1 2 m diffuser



cod. standard	color incluso	length	diffuser
 PA1407G-F	silver	2 mt	semi opal
 PA1407G-O	silver	2 mt	opal
 PA1407G-T	silver	2 mt	transparent

## ACCESSORIES



**cod. PAT1407K-G**  
kit includes 2 end caps  
one with hole and one blind



**cod. PAC1407**  
fixing clip



**ST00052408-9x0**  
Linya COB Strip CRI>90  
24Vdc - 8W/m - 320 LED/m - IP20



**ST10052414-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 14.4W/m - 128 LED/m - IP20



## Professional Aluminium LED Profile

# S15 REGULAR

surface, ceiling, wall



**SURFACE IN-  
STALLATION**




**MAX. DISSIPATION 30 W/m**



**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable




S15 is an extremely versatile standard profile in anodized aluminum. Its clean shape makes it suitable for any type of installation on surfaces or fixed by clips to the ceiling / wall. Diffuser in opal, semi-opal and transparent polycarbonate. Possibility of customizing profiles complete with LED strips, power cord and fixing accessories.






### THE STANDARD PACKAGE INCLUDES:

- 1 2 m aluminium profile
- 1 2 m diffuser



cod.	color	length standard	diffuser included
 PA1715G-F	silver	2 mt	semi opal
 PA1715G-O	silver	2 mt	opal
 PA1715G-T	silver	2 mt	transparent

cod.	color	length standard	diffuser included
 PA1715W-F	white	2 mt	semi opal
 PA1715W-O	white	2 mt	opal
 PA1715W-T	white	2 mt	transparent

## ACCESSORIES



**cod. PAT1715K-G** (Gray)  
**cod. PAT1715K-W** (White)  
kit includes 2 end caps  
one with hole and one blind




**cod. PAC1715**  
fixing clip



**ST00052415-9x0**  
Linya COB Strip CRI>90  
24Vdc - 15W/m - 480 LED/m - IP20




**ST10052419-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 19.2W/m - 160 LED/m - IP20

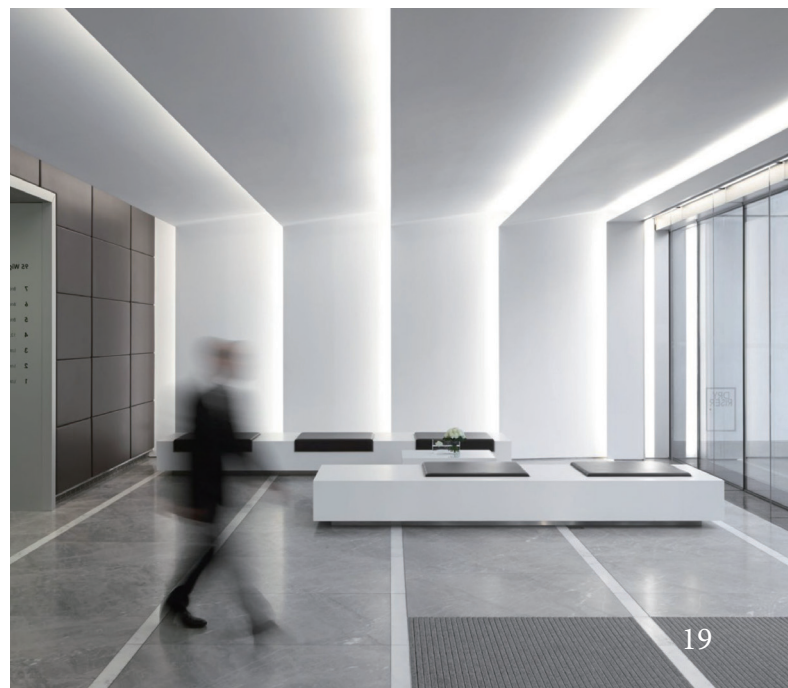

## Professional Aluminium LED Profile

# S9 WIDE SLIM

surface, ceiling, wall



**SURFACE  
INSTALLATION**




**MAX. DISSIPATION  
30 W/m**






**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable




S9 is a slim and at the same time wide profile in anodized aluminum that is extremely versatile. Thanks to its internal capacity, it also allows the housing of 2 side-by-side strips in order to create variable white effects from warm to cold or whiter color effects. It can be used on any surface or fixed to the wall or ceiling using the appropriate clips. S9 is available in different colors and has the possibility of choosing between three types of diffuser, opal, semi-opal and transparent. Possibility of customizing profiles complete with single or double LED strip inside, power cable and accessories for suspension or surface mounting.




### THE STANDARD PACKAGE INCLUDES:

- 1 2 m aluminium profile
- 1 2 m diffuser


cod.	color	length standard	diffuser included
 PA2209G-F	silver	2 mt	semi opal
 PA2209G-O	silver	2 mt	opal
 PA2209G-T	silver	2 mt	transparent

cod.	color	length standard	diffuser included
 PA2209W-F	white	2 mt	semi opal
 PA2209W-O	bianco	2 mt	opal
 PA2209W-T	bianco	2 mt	transparent

## ACCESSORIES




**cod. PAT2209K-G** (Gray)  
**cod. PAT2209K-W** (White)  
kit includes 2 end caps  
one with hole and one blind



**cod. PAC2209**  
fixing clips



**ST00052415-9x0**  
Linya COB Strip CRI>90  
24Vdc - 15W/m - 480 LED/m - IP20



**ST10052419-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 19.2W/m - 160 LED/m - IP20





# T16 CORNER

surface, ceiling, wall



**SURFACE  
INSTALLATION**





**MAX. DISSIPATION**  
30 W/m



**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable

T16 is a triangular profile in anodized aluminum with a diffuser on 45° at full opening, this allows all the light from the contained strip to come out and be used to illuminate the surrounding environment. Its right-angled shape makes it suitable for any type of installation, resting on a veil or fixed with clips in the corners of the ceiling, beams and columns, ideal for under-cabinet lighting. Possibility of customizing profiles complete with LED strip, power cable and installation accessories.



**THE STANDARD PACKAGE INCLUDES:**

- 1 2 m aluminium profile
- 1 2 m diffuser

cod.	color	length standard	diffuser included
<input checked="" type="checkbox"/> PA1616G-F	silver	2 mt	semi opal
<input checked="" type="checkbox"/> PA1616G-O	silver	2 mt	opal
<input checked="" type="checkbox"/> PA1616G-T	silver	2 mt	transparent
cod.	color	length standard	diffuser included
<input type="checkbox"/> PA1616W-F	white	2 mt	semi opal
<input type="checkbox"/> PA1616W-O	white	2 mt	opal
<input type="checkbox"/> PA1616W-T	white	2 mt	transparent

## ACCESSORIES



**cod. PAT1616K-G** (Gray)  
**cod. PAT1616K-W** (White)  
kit includes 2 end caps  
one with hole and one blind



**cod. PAC1616**  
fixing clips



**ST00052415-9x0**  
Linya COB Strip CRI>90  
24Vdc - 15W/m - 480 LED/m - IP20



**ST10052419-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 19.2W/m - 160 LED/m - IP20



# S35 SQUARE

surface, ceiling, wall suspension



suspended  
surface  
INSTALLATION




MAX. DISSIPATION  
50 W/m




**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable



S35 Square is a modular system in aluminum with linear elements that can be connected together and can be installed in suspension, ceiling or wall versions. Two different models of diffuser, microprismatic (UGR<19) or opal diffuser. Available in the standard versions with silver or white anodized body, while the black and corten colors are only upon request. Possibility of customizing profiles complete with LED strips single or double inside, power cable and accessories for suspension or surface mounting.





THE STANDARD KIT INCLUDES:

- 1 2 m aluminium profile
- 1 2 m diffuser



cod.	color	length standard	diffuser included
 PA3535G-P	silver	2 mt	prismatic
 PA3535G-O	silver	2 mt	opal

cod.	color	Length standard	diffuser included
 PA3535W-P	white	2 mt	prismatic
 PA3535W-O	white	2 mt	opal

## ACCESSORIES



**cod. PAG3535**  
linear joint



**cod. PAG3535-90**  
90° flat joint



**cod. PAG3535-90V**  
90° vertical joint



**cod. PAT3535-G** (gray )  
**cod. PAT3535-W**(White)  
Blind end cap



**cod. PAC3535**  
wall fixing clip



**PAS3535**  
Suspension kit  
including 2 cables and 4 supports



**ST00052415-9x0**  
Linya COB Strip CRI>90  
24Vdc - 15W/m - 480 LED/m - IP20






**ST10052419-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 19.2W/m - 160 LED/m - IP20



## Professional Aluminium LED Profile

# S55 DOUBLE

surface, ceiling, wall suspension



**SURFACE**  
installation




**MAX. DISSIPATION**  
60W/m



**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable

S55 Double is a modular system in aluminum with linear elements that can be connected together and can be installed in suspension, ceiling or wall versions. Two or only one light outlet as desired, two different models of diffuser for the lower light, micro-prismatic (UGR<19) or opal diffuser. Available in versions standard with silver or white anodized body while black and corten colors are only upon request. Possibility of customizing the profiles complete with single or double LED strip inside, power cable and accessories for suspension or surface fixing.



### THE SATANDARD KIT INCLUDES :

- 1 2 m aluminium profile
- 1 2 m diffuser



cod.	color	length standard	diffuser lower	diffuser upper
PA7055G-P	white	2 mt	prismatic	opal
PA7055G-O	white	2 mt	opal	opal

cod.	color	length standard	diffuser lower	diffuser upper
PA7055W-P	white	2 mt	prismatic	opal
PA7055W-O	white	2 mt	opal	opal

## ACCESSORIES




**cod. PAG3535**  
linear joint



**cod. PAG3535-90**  
90° flat joint



**cod. PAG3535-90V**  
90° vertical joint



**cod. PAT7055-G** (Gray)  
**cod. PAT7055-W** (White)  
blind end cap



**cod. PAC7055**  
wall fixing clip



**PAS7055**  
suspension kit  
with 2 cables and 4 supports



**ST00052415-9x0**  
Linya COB Strip CRI>90  
24Vdc - 15W/m - 480 LED/m - IP20



**ST10052419-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 19.2W/m - 160 LED/m - IP20





## Professional Aluminium LED Profile

# T24 ROUND

surface, ceiling, wall and suspension



**SURFACE  
INSTALLATION**




**MAX.  
DISSIPATION  
28 W/m**



**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable



T24 is an extremely versatile round anodized aluminum profile. Thanks to the optional fixing accessories, suspended installation is possible, on a surface with a rigid bracket or with an adjustable bracket and finally with lateral brackets for fixing between two walls which could be, for example, those of the inside of a wardrobe. Available in two colors, anodized silver or white. Possibility of customizing profiles complete with LED strips inside them, power cable and fixing accessories of your choice.



### THE STANDARD KIT INCLUDES:

- 1 2 m aluminium profile
- 1 2 m diffuser

cod.	color	length standard	diffuser included
 PA2424G-O	silver	2 mt	opal
 PA2424G-T	silver	2 mt	transparent

cod.	color	length standard	diffuser included
 PA2424W-O	white	2 mt	opal
 PA2424W-T	white	2 mt	transparent

## ACCESSORIES



**cod. PAC2424-A**  
adjustable clip



**cod. PAC2424-B**  
head clip



**cod. PAC2424S-B**  
vertical aluminium bracket



**PAS2424**  
Suspension kit  
with 2 cables and 4 supports




**cod. PAT2424K-G** (Gray)  
**cod. PAT2424K-W** (White)  
kit including 2 end caps  
one with hole and one blind



**ST00052408-9x0**  
Linya COB Strip CRI>90  
24Vdc - 8W/m - 320 LED/m - IP20



**ST00052415-9x0**  
Linya COB Strip CRI>90  
24Vdc - 15W/m - 480 LED/m - IP20



**ST10052419-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 19.2W/m - 160 LED/m - IP20



## Professional Aluminium LED Profile

# R7 INCASSO SLIM

## Recessed installation



**RECESSED  
INSTALLATION**




**MAX. DISSIPATION  
15 W/m**



**TAILOR MADE  
custom cut service  
strip installed with  
accessories and cable**

R7 is a recessed profile in anodized aluminum with reduced dimensions also in depth. This allows all the light emitted by the strip to go out and to illuminate the surrounding environment or objects. Suitable for being recessed in any type of material such as false walls, floors and furniture. Possibility of customizing profiles complete with LED strips, power cord and accessories.



### THE STANDARD KIT INCLUDES:

- 1 2 m aluminium profiler
- 1 2 m diffuser

cod.	color	length standard	diffuser included
PA2405iG-F	silver	2 mt	semik opal
PA2405iG-O	silver	2 mt	opal
PA2405iG-T	silver	2 mt	transparent
cod.	color	length standard	diffuser included
PA2405iW-F	white	2 mt	semi opal
PA2405iW-O	white	2 mt	opal
PA2405iW-T	white	2 mt	transparent

## ACCESSORIES



**cod. PAT2405K-G** (gray)  
**cod. PAT2405K-W** (white)  
kit includes 2 end caps  
one with hole and one blind.



**ST00052408-9x0**  
Linya COB Strip CRI>90  
24Vdc - 8W/m - 320 LED/m - IP20



**ST10052414-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 14.4W/m - 128 LED/m - IP20



## Professional Aluminium LED Profile

# R24 WIDE CEILING RECESSED

ceiling recessed with springs



**ISURFACE  
INSTALLATION**





**MAX.  
DISSIPATION  
28 W/m**



**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable

R24 is a wide aluminum profile for installation in false ceilings. Thanks to the optional spring fixing accessories, it is possible to install them in false ceilings of different materials, such as plasterboard or wood. Available in two colors, silver or white. Possibility of customizing profiles complete with one or two LED strips inside them, power cable and fixing accessories of your choice.



### STANDARD KIT INCLUDES:


- 1 2 m aluminium profile
- 1 2 m diffuser

cod.	color	length standard	diffuser e included
 <b>PA4318iG-O</b>	silver	2 mt	opal
 <b>PA4318iG-T</b>	silver	2 mt	transparent

cod.	color	length standard	diffuser included
 <b>PA4318iW-O</b>	white	2 mt	opal
 <b>PA4318iW-T</b>	white	2 mt	transparent



## ACCESSORIES



**cod. PAT4318K-G** (Gray)  
**cod. PAT4318K-W** (White)  
kit includes 2 hole caps



**cod. PAM4318**  
fixing clip



**ST00052415-9x0**  
Linya COB Strip CRI>90  
24Vdc - 15W/m - 480 LED/m - IP20



**ST10052419-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 19.2W/m - 160 LED/m - IP20





# TR15 CONCEALED RECESSED

flush recessed installation for plasterboard



**RECESSED**  
installation




**MAX.**  
**DISSIPATION**  
50 W/m




**TAILOR MADE**  
custom cut service  
strip installed with  
accessories and cable

White extruded aluminum profile, modular for continuous or single row installations. Ideal for assembling any type of LED strip inside. Diffuser in anti-yellowing satin polycarbonate, set back about 15 mm from the ceiling to ensure comfortable lighting in the room below. Optional junction accessories are available for installation in a continuous row.



**THE STANDARD KIT INCLUDES:**

- 1 3 m aluminium profile
- 1 3 m diffuser



**cod.**

**color**

**length**  
**standard**

**diffuser**  
**included**



**PA10025B-3**

white

3 mt

satin

## ACCESSORIES



**cod. PAT6214K-B** (white)  
kit includes 2 end terminal caps  
one with hole and one blind




**cod. PAG11641**  
linear joint



**ST00052408-9x0**  
Linya COB Strip CRI>90  
24Vdc - 8W/m - 320 LED/m - IP20



**ST10052414-8x0**  
Linya SMD Strip CRI>80  
24Vdc - 14.4W/m - 128 LED/m - IP20

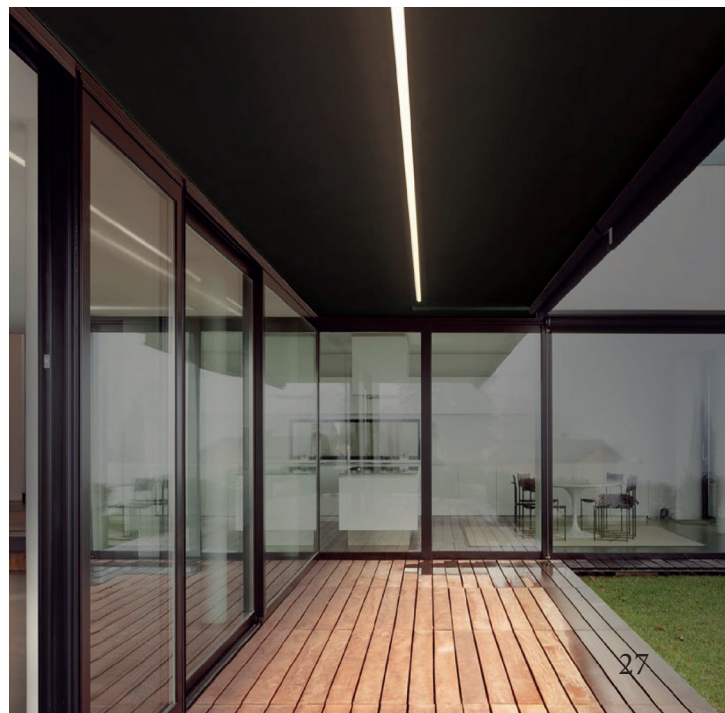



PrimOtek s.r.l.s.  
via Primo Maggio, 19  
25013 Carpenedolo (BS) Italia  
tel: +39 0302389856  
[www.primotek.it](http://www.primotek.it) - [info@primotek.it](mailto:info@primotek.it)