
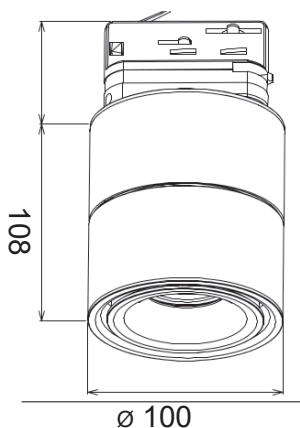


AKIS LED-15W-CCT-36°-Track

220V 240V	UGR <16	IP20	IK03			ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	------------	------	------	--	--	------------------------	---------	------------------

Item: BN0215MW-TW

Recessed downlight LED, 220-240Vac, 15W,
2700K-4000K-6000K, CRI>80, White reflector



Description

Available in two versions, for track and ceiling installation.
Adjustable head, 90° on the vertical axis and 320° on the horizontal axis.
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED light efficiency
Nominal flux: -
White color temperature: 2700K-4000K-6000K.
Color rendering index: CRI>80.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 1350-1550 lm

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 15W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: I.
Functions: On-Off.

Technical Description

Frame finish: White.
Protection: IP20
Mechanical resistance: IK03.
Quality marks: CE, RoHS..

Installation

Ceiling or electrified track installation.
Fixing base in painted metal.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF015-G
(G) Shiny gold reflector



cod. LEN012-N
(N) Lens 20° - (N) 15° Lens





cod. SUS001
Suspension cable

AKIS LED-15W-CCT-36°-Track

220V 240V	UGR <16	IP20	IK03			ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	------------	------	------	--	--	------------------------	---------	------------------

Item: BN0215MB-TW

Recessed downlightLED, 220-240Vac, 15W,
2700K-4000K-6000K, CRI>80, Black reflector

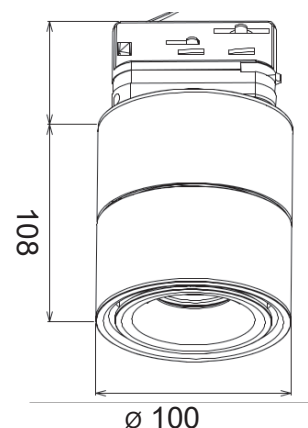

Description

Available in two versions, for track and ceiling installation.
Adjustable head, 90° on the vertical axis and 320° on the horizontal axis.
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED light efficiency
Nominal flux: -
White color temperature: 2700K-4000K-6000K.
Color rendering index: CRI>80.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 1350-1550 lm

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 15W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: I.
Functions: On-Off

Technical Description

Frame finish: Black.
Protection: IP20
Mechanical resistance: IK03.
Quality marks: CE, RoHS..

Installation

Ceiling or electrified track installation.
Fixing base in painted metal.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF015-G
(G) Shiny gold reflector



cod. LEN012-N
(N) Lens 20° - (N) 15° Lens



cod. SUS001
Suspension cable