




# CLEVY LED ZOOM 15°-50°-CCT

220V 240V	UGR <16	IP20	IK03			ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	------------	------	------	--	--	------------------------	---------	------------------

## Item: BND0125ZW-TW

Recessed with Spot ZOOM DALI dim. downlightLED, 220-240Vac, 25W,  
2700K-3000K-4000K, CRI>90, White reflector, zoom 15°-50° adjustable

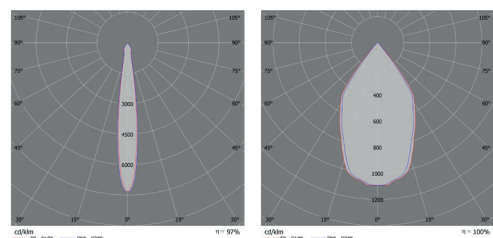

### Description

Integrated 15°-50° Zoom optical system with manual adjustment.  
Adjustable head, 90° on the vertical axis and 320° on the horizontal one.  
Die-cast aluminum body.  
Powder coating anti-yellowing stabilized against UV rays.  
Reflectors in metallized PC.  
Compliant: EN 60598-1 and EN 60598-2-2.

### Light source

COB LED light efficiency  
Nominal flux: -  
White color temperature: 2700K-3000K-4000K.  
Color rendering index: CRI>90.  
Lifetime: >50000h with L70.  
Number of light sources: 1.  
Output flux of the equipment: 1350-2000 lm

### Electrical data

Driver power supply: input 220-240 Vac.  
Average system power consumption: 25W.  
Driver protections: Thermal, short circuit, overvoltage.  
Driver connection: whit Internal terminal block.  
Insulation class: I.  
Functions: DALI.

### Technical Description

Frame finish: White.  
Protection: IP20  
Mechanical resistance: IK03.  
Quality marks: CE, RoHS..

### Installation

Ceiling or electrified track installation.  
Fixing base in painted metal.  
These devices are designed for modern control systems.  
For different options, see the "Light Control" section.

### Standard:

Quality marks: CE RoHS  
Standards: CEI EN 60598-1; CEI EN 60598-2-03.  
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015