




DLX LED - 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **RC0320LB-927** (version on-off)

Item.: **RCD0320LB-927** (version DALI)

Recessed downlight LED, 220-240Vac, 20W,
2700K, CRI92, Standard 60° - Black reflector



Description

Trimless fixing system without frame.
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 2700lm.
White color temperature: 2700 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 2103 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 20W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø130mm; reflector Ø95mm x H. 89mm, cutout Ø95mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015


ACCESSORIES



cod. REF020-N
(B) Gloss black reflector



cod. REF020-S
(S) Glossy silver reflector




cod. REF020-G
(G) Glossy gold reflector



cod. LEN020-S
(S) 20° Lens



cod. LEN020-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.


DLX LED - 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **RC0320LB-930** (version on-off)

Item.: **RCD0320LB-930** (version DALI)

Recessed downlightLED, 220-240Vac, 20W,
3000K, CRI92, Standard 60°- Black reflector



Description

Trimless fixing system without frame.
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 2700lm.
White color temperature: 3000 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 2191 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 20W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation


Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø130mm; reflector Ø95mm x H. 89mm, cutout Ø95mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

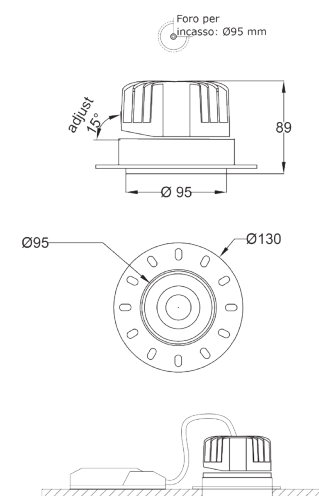

ACCESSORIES



cod. REF020-N
(B) Gloss black reflector



cod. REF020-S
(S) Glossy silver reflector




cod. REF020-G
(G) Glossy gold reflector



cod. LEN020-S
(S) 20° Lens



cod. LEN020-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.


DLX LED - 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: RC0320LB-940 (version on-off)

Item.: RCD0320LB-940 (version DALI)

Recessed downlight LED, 220-240Vac, 20W,
4000K, CRI92, Standard 60° - Black reflector



Description

Trimless fixing system without frame.
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 2700lm.
White color temperature: 4000 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 2221 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 20W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation


Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø130mm; reflector Ø95mm x H. 89mm, cutout Ø95mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

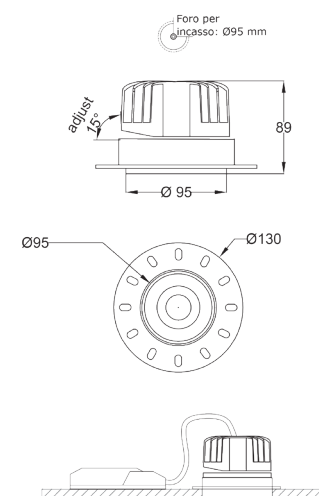

ACCESSORIES



cod. REF020-N
(B) Gloss black reflector



cod. REF020-S
(S) Glossy silver reflector




cod. REF020-G
(G) Glossy gold reflector



cod. LEN020-S
(S) 20° Lens



cod. LEN020-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.



DLX LED - 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **RC0320LW-927** (version on-off)

Item.: **RCD0320LW-927** (version DALI)

Recessed downlight LED, 220-240Vac, 20W,
2700K, CRI92, Standard 60°- white reflector

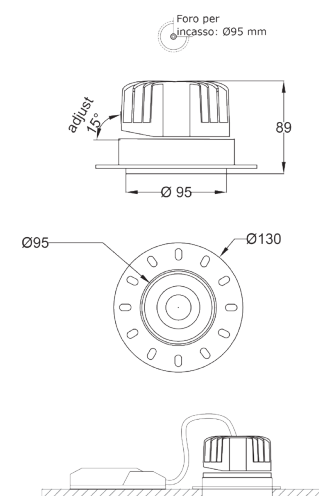

Description

Trimless fixing system without frame.
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 2700lm.
White color temperature: 2700 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 2103 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 20W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø130mm; reflector Ø95mm x H. 89mm, cutout Ø95mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF020-N
(B) Gloss black reflector



cod. REF020-S
(S) Glossy silver reflector




cod. REF020-G
(G) Glossy gold reflector



cod. LEN020-S
(S) 20° Lens



cod. LEN020-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.


DLX LED - 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **RC0320LW-930** (version on-off)

Item.: **RC0320LW-930** (version DALI)

Recessed downlight LED, 220-240Vac, 20W,
3000K, CRI92, Standard 60°- white reflector



Description

Trimless fixing system without frame.
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 2700lm.
White color temperature: 3000 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 2191 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 20W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation


Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø130mm; reflector Ø95mm x H. 89mm, cutout Ø95mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

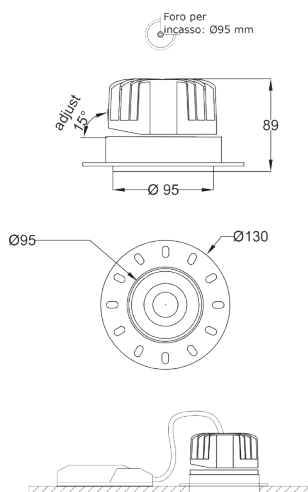


ACCESSORIES



cod. REF020-N
(B) Gloss black reflector



cod. REF020-S
(S) Glossy silver reflector




cod. REF020-G
(G) Glossy gold reflector



cod. LEN020-S
(S) 20° Lens



cod. LEN020-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.


DLX LED - 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **RC0320LW-940** (version on-off)

Item.: **RC0320LW-940** (version DALI)

Recessed downlight LED, 220-240Vac, 20W,
4000K, CRI92, Standard 60°- white reflecto



Description

Trimless fixing system without frame.
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 2700lm.
White color temperature: 4000 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 2221 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 20W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation


Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø130mm; reflector Ø95mm x H. 89mm, cutout Ø95mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

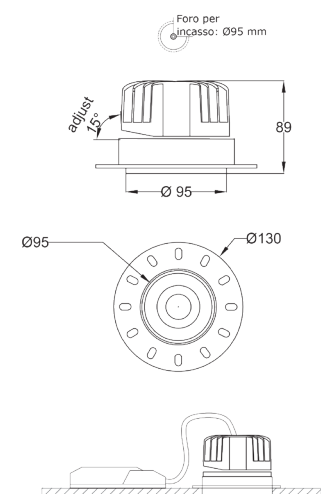

ACCESSORIES



cod. REF020-N
(B) Gloss black reflector



cod. REF020-S
(S) Glossy silver reflector




cod. REF020-G
(G) Glossy gold reflector



cod. LEN020-S
(S) 20° Lens



cod. LEN020-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.