


DLX LED - 12W



220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

Item.: **RC0312LB-927** (version on-off)
Item.: **RCD0312LB-927** (version DALI)

Recessed downlight LED, 220-240Vac, 12W,
2700K, CRI92, Standard 60°- white reflector



Foro per
incasso: Ø75 mm



Description

Trimless fixing system without frame
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 1620lm.
White color temperature: 2700 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 1526 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 12W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø101mm; reflector Ø75mm x H. 89mm, cutout Ø75mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-N
(B) Gloss black reflector



cod. REF012-S
(S) Glossy silver reflector




cod. REF012-G
(G) Glossy gold reflector



cod. LEN012-S
(S) 20° Lens



cod. LEN012-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.


DLX LED - 12W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------




Item.: **RC0312LB-930** (version on-off)

Item.: **RC0312LB-930** (version DALI)

Recessed downlight LED, 220-240Vac, 12W,
3000K, CRI92, Standard 60°- white reflector



Foro per
incasso: Ø75 mm



Description

Trimless fixing system without frame
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 1620lm.
White color temperature: 3000 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 1590 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 12W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø101mm; reflector Ø75mm x H. 89mm, cutout Ø75mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-N
(B) Gloss black reflector



cod. REF012-S
(S) Glossy silver reflector




cod. REF012-G
(G) Glossy gold reflector



cod. LEN012-S
(S) 20° Lens



cod. LEN012-M
(M) 36° Lens




cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.



DLX LED - 12W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **RC0312LB-940** (version on-off)
Item.: **RCD0312LB-940** (version DALI)
Recessed downlight LED, 220-240Vac, 12W,
4000K, CRI92, Standard 60°- white reflector



Foro per
incasso: Ø75 mm



Description

Trimless fixing system without frame
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 1620lm.
White color temperature: 4000 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 1611 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 12W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø101mm; reflector Ø75mm x H. 89mm, cutout Ø75mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-N
(B) Gloss black reflector



cod. REF012-S
(S) Glossy silver reflector




cod. REF012-G
(G) Glossy gold reflector



cod. LEN012-S
(S) 20° Lens



cod. LEN012-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.


DLX LED - 12W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------




Item.: **RC0312LW-927** (version on-off)

Item.: **RCD0312LW-927** (version DALI)

Recessed downlightLED, 220-240Vac, 12W,
2700K, CRI92, Standard 60° - white reflector



Foro per
incasso: Ø75 mm



Description

Trimless fixing system without frame
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 1620lm.
White color temperature: 2700 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 1526 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 12W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø101mm; reflector Ø75mm x H. 89mm, cutout Ø75mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-N
(B) Gloss black reflector



cod. REF012-S
(S) Glossy silver reflector




cod. REF012-G
(G) Glossy gold reflector



cod. LEN012-S
(S) 20° Lens



cod. LEN012-M
(M) 36° Lens





cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.

DLX LED - 12W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **RC0312LW-930** (version on-off)
 Item.: **RCD0312LW-930** (version DALI)
 Recessed downlightLED, 220-240Vac, 12W,
 3000K, CRI92, Standard 60°- white reflector

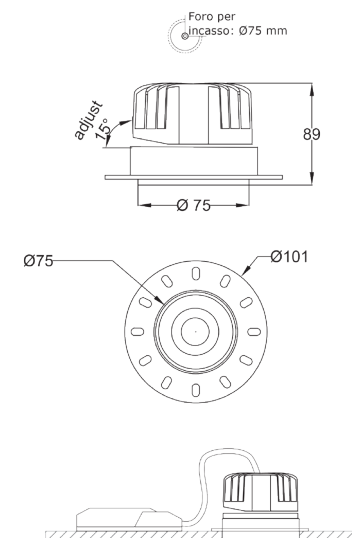

Description

Trimless fixing system without frame
 Die-cast aluminum body.
 Powder coating anti-yellowing stabilized against UV rays.
 Reflectors in metallized PC.
 Upper LED frosted screen in PC.
 Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
 Nominal flux: 1620lm.
 White color temperature: 3000 K.
 Color rendering index: CRI92.
 Lifetime: >50000h with L70.
 Number of light sources: 1.
 Output flux of the equipment: 1590 lm.

Electrical data

Driver power supply: input 220-240 Vac.
 Average system power consumption: 12W.
 Driver protections: Thermal, short circuit, overvoltage.
 Driver connection: whit Internal terminal block.
 Insulation class: II.
 Functions: On-Off / DALI

Technical Description

Frame finish: white.
 Lamp protection: IP44.
 Driver protection: IP20.
 Mechanical resistance: IK08.
 Quality marks: CE, RoHS..

Installation

Trimless recessed installation.
 Fixing by crown system to be integrated into the false ceiling.
 These devices are designed for modern control systems.
 For different options, see the "Light Control" section.

Dimensions

Crown Ø101mm; reflector Ø75mm x H. 89mm, cutout Ø75mm

Standard:

Quality marks: CE RoHS
 Standards: CEI EN 60598-1; CEI EN 60598-2-03.
 2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-N
(B) Gloss black reflector



cod. REF012-S
(S) Glossy silver reflector




cod. REF012-G
(G) Glossy gold reflector



cod. LEN012-S
(S) 20° Lens



cod. LEN012-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.


DLX LED - 12W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------



Item.: **RC0312LW-940** (version on-off)

Item.: **RCD0312LW-940** (version DALI)

Recessed downlight LED, 220-240Vac, 12W,
4000K, CRI92, Standard 60°- white reflector



Foro per
incasso: Ø75 mm



Description

Trimless fixing system without frame
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 1620lm.
White color temperature: 4000 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 1611 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 12W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Trimless recessed installation.
Fixing by crown system to be integrated into the false ceiling.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Crown Ø101mm; reflector Ø75mm x H. 89mm, cutout Ø75mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-N
(B) Gloss black reflector



cod. REF012-S
(S) Glossy silver reflector




cod. REF012-G
(G) Glossy gold reflector



cod. LEN012-S
(S) 20° Lens



cod. LEN012-M
(M) 36° Lens



cod. KEM-90E
Emergency kit for LED equipment
complete with battery for 3 hours duration.