

light management

PUSH & Bluetooth DIMMER

Dimmer / On-Off single colour

PUSH

Bluetooth

RF

12V
24V

IP20

IK06


FLUECKNER
FREE

CE

RoHS

Ta
-20° +50°C

Control Dimmer Push / Bluetooth

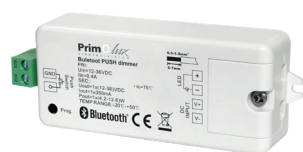

cod.

ELSB9101CS3-BT

INPUT

12/24V

CONTROL

BLUETOOTH / PUSH / RF

POWER



8A

CHANNEL OUTPUT


1 CH

PUSH and BLUETOOTH low voltage dimmers

- Power supply 12 / 24VdcVac.
- Dimmer / On-OFF BLUETOOTH+RF, radio frequency: 2.4 GHz
- Constant Voltage Power Supply (Vdc) 12 / 24 / 36.
- Modulated constant voltage output (Vdc) 12 / 24 / 36, 8 A.
- Controllable via BLUETOOTH, Normally Open Button (NO) and dedicated radio remote control
- When several devices of the same system are used, a 'Mesh' network is generated, which allows via the bilateral transmission of the components that are part of it, a more solid and wider coverage area.
- Transmission distance of up to 30 m between each two devices in the 'Mesh' Network.
- Compatible with universal RF+Bluetooth remote controls, each LED controller can pair to max. 8 remote controls.

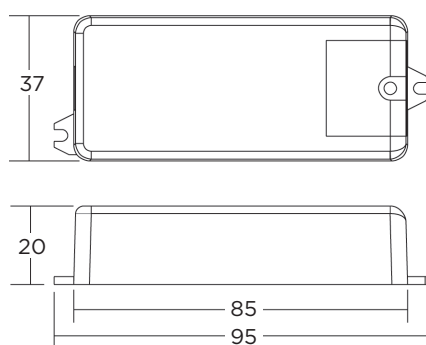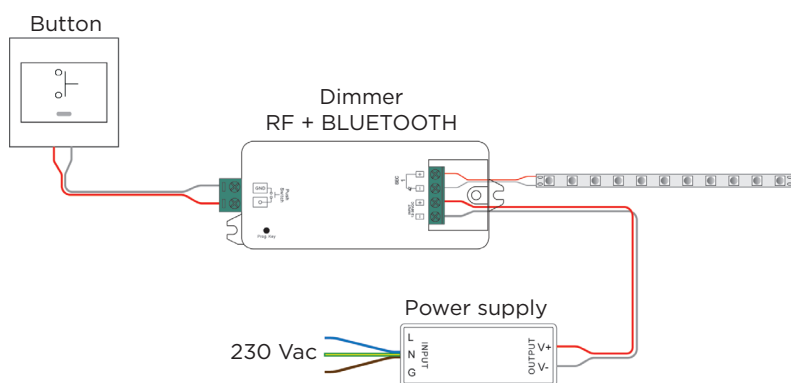

ACCESSORIES



4-zone radio control
Bluetooth + RF
30 m transmission range
Active transceiver on 'Mesh' network"
cod.ELSB2819SDIM