


F200 LED-TW



Soft light LED 200W / Tunable White / DMX

ITEM: FLS200L-TW


F 200L LED-TW is a Flood soft light projector with a 200W tunable white LED source. Microprismatic and anti-glare diffuser. 16bit Dimmer and control via DMX signal with RDM functions. Manual Knobs for Dinner and Color Temperature adjustment Up to 120° beam angle. Standard DMX512-RDM control signal. DALI (optional), DMX Wireless (optional). Digital display for function setting and manual operation. Included 4-leaves barndoor.

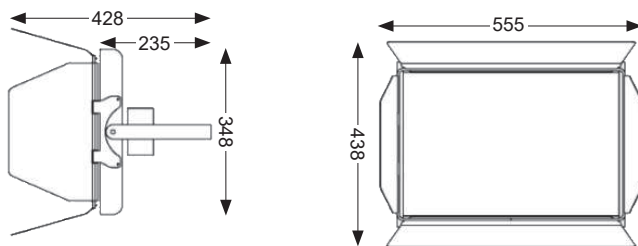


LIGHT OUTPUT DIAGRAM

Indicative measurements

Distance	1 m	2 m	3 m	4 m
LUX 5700K:	17042 lx	4263 lx	1895 lx	1066 lx
LUX 3200K:	13838 lx	3459 lx	1538 lx	865 lx
Ø:	3.46 m	6.93 m	10.39 m	13.88 m

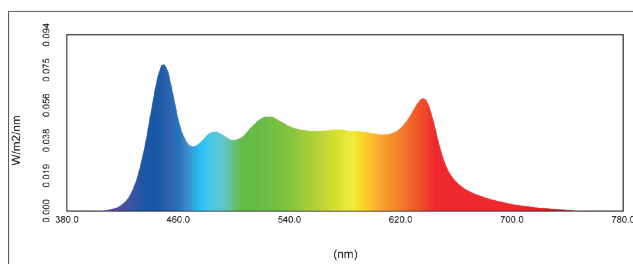

Power Consumption: 200W
Voltage: 100-240V AC
Frequency: 50/60Hz
Light Source: LED
Lens: Matrix compound eye optical system
Color temperature: 3200K<>5600K Adjustable
CRI: 97 / TLCI>90
Beam Angle: 120°
Dimming Range: 16bit smooth dimming 0-100%
DMX Channel: 2CH/3CH/5CH Optional
Control system: DMX512/ Potentiometer
Manual Rotary Knob for dim and TW adjust
RDM Functions
Display Screen: 4-Button LCD Screen
IP Rating: IP23
Ambient Temp.: -15°...40°C
Product size: 555x437x427mm
Weight: 6.2kgs

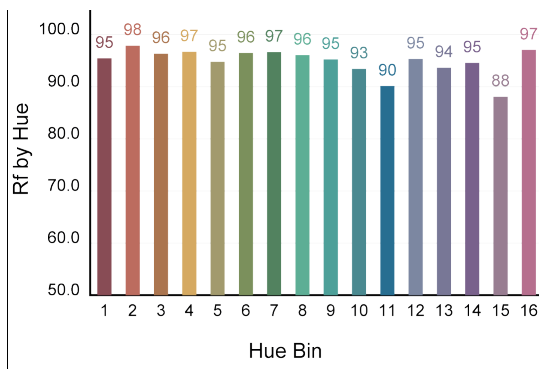

Hue Bin	Hue Angle	CRI
1	0.0° - 22.5°	95
2	22.5° - 45.0°	98
3	45.0° - 67.5°	96
4	67.5° - 90.0°	97
5	90.0° - 112.5°	95
6	112.5° - 135.0°	96
7	135.0° - 157.5°	97
8	157.5° - 180.0°	96
9	180.0° - 202.5°	95
10	202.5° - 225.0°	93
11	225.0° - 247.5°	90
12	247.5° - 270.0°	95
13	270.0° - 292.5°	94
14	292.5° - 315.0°	95
15	315.0° - 337.5°	88
16	337.5° - 360.0°	97

Primotek s.r.l.s si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
Primotek s.r.l.s reserve the right to change products specifications at anytime without prior notice