

LUA LED - 30W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

Item.: **RC1030W-CCT** (version on-off)

Item.: **RCD1030W-CCT** (version DALI)

Recessed downlight LED, 220-240Vac, 30W,

3000K/4000K/6000k, CRI80, White diffuser - Anti-glare optics



Description

Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
UGR<19
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

LED module with nominal efficiency up to 150 lumens/Watt.
Nominal flux: 4500 lm.
White color temperature: 3000K/4000K/6000 K.
Color rendering index: CRI80.
Lifetime: >48000h with L70.
Number of light sources: 1.
Output flux of the equipment: 3900 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 30W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: white Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: White.
Lamp protection: IP54.
Driver protection: IP40.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation



Recessed installation.
Fixing by steel springs.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Front, hole Ø230 mm x H.76 mm, hole Ø210 mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

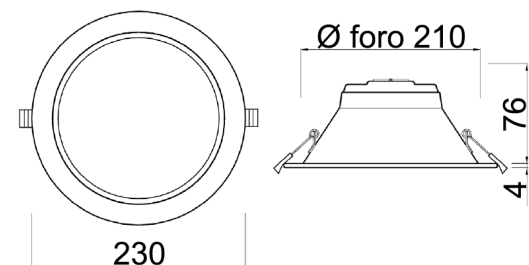

ACCESSORIES



cod. KEM-90E

Emergency kit for LED equipment
complete with battery for 3 hours.