



SGL LED - 3 x 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

cod.: RC0520LB-927 (version on-off)

cod.: RCD0520LB-927 (version DALI)

Recessed downlight LED, 220-240Vac, 60W,
2700K, CRI92, Standard 60° - Black reflector

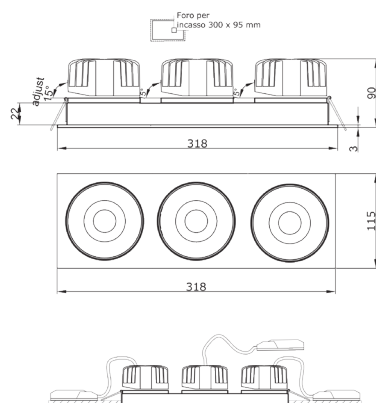

Description

modular ceiling recessed system
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 8100 lm.
White color temperature: 2700 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 3.
Output flux of the equipment: 2103 x 3 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 60W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: Black.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Recessed installation.
Fixing by steel springs.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

318x 115 x H.87mm, hole Ø95mm.

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORI



cod. REF020-S
(S) Riflettore silver lucido




cod. REF020-G
(G) Riflettore oro lucido



cod. LENO20-S
(S) Lente 24°



cod. LENO20-L
(L) Lente 60°





cod. KEM-90E
Kit emergenza per apparecchiature LED
completo di batteria per la durata di 3 ore.

SGL LED - 3 x 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

cod.: **RC0520LB-930** (version on-off)
cod.: **RCD0520LB-930** (version DALI)

Recessed downlight LED, 220-240Vac, 60W,
3000K, CRI92, Standard 60°- Black reflector

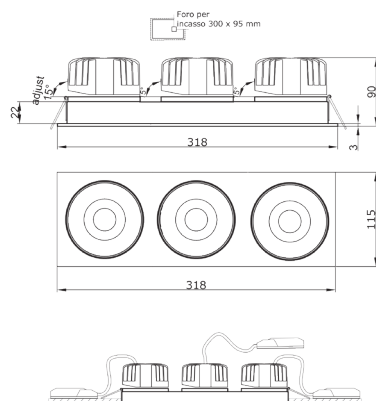

Description

modular ceiling recessed system
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 8100 lm.
White color temperature: 3000 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 3.
Output flux of the equipment: 2191 x 3 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 60W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: Black.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Recessed installation.
Fixing by steel springs.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

3x20W: Ø318x 115 x H.87mm, hole Ø95mm.

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORI



cod. **REF020-S**
(S) Riflettore silver lucido




cod. **REF020-G**
(G) Riflettore oro lucido



cod. **LENO20-S**
(S) Lente 24°



cod. **LENO20-L**
(L) Lente 60°





cod. **KEM-90E**
Kit emergenza per apparecchiature LED
completo di batteria per la durata di 3 ore.

SGL LED - 3 x 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

cod.: **RC0520LB-940** (version on-off)
 cod.: **RCD0520LB-940** (version DALI)
 Recessed downlight LED, 220-240Vac, 60W,
 4000K, CRI92, Standard 60°- Black reflector

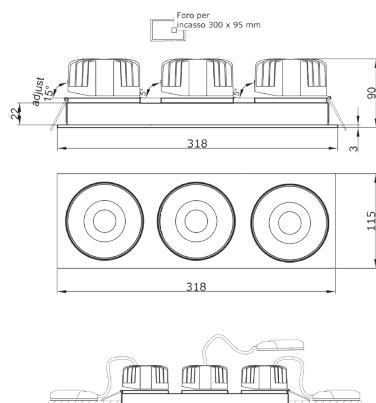

Description

modular ceiling recessed system
 Die-cast aluminum body.
 Powder coating anti-yellowing stabilized against UV rays.
 Reflectors in metallized PC.
 Upper LED frosted screen in PC.
 Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
 Nominal flux: 8100 lm.
 White color temperature: 4000 K.
 Color rendering index: CRI92.
 Lifetime: >50000h with L70.
 Number of light sources: 3.
 Output flux of the equipment: 2221 x 3 lm.

Electrical data

Driver power supply: input 220-240 Vac.
 Average system power consumption: 60W.
 Driver protections: Thermal, short circuit, overvoltage.
 Driver connection: whit Internal terminal block.
 Insulation class: II.
 Functions: On-Off / DALI

Technical Description

Frame finish: Black.
 Lamp protection: IP44.
 Driver protection: IP20.
 Mechanical resistance: IK08.
 Quality marks: CE, RoHS..

Installation

Recessed installation.
 Fixing by steel springs.
 These devices are designed for modern control systems.
 For different options, see the "Light Control" section.

Dimensions

Ø318x 115 x H.87mm, hole Ø95mm.

Standard:

Quality marks: CE RoHS
 Standards: CEI EN 60598-1; CEI EN 60598-2-03.
 2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORI



cod. REF020-S
(S) Riflettore silver lucido




cod. REF020-G
(G) Riflettore oro lucido



cod. LENO20-S
(S) Lente 24°



cod. LENO20-L
(L) Lente 60°



cod. KEM-90E
Kit emergenza per apparecchiature LED
completo di batteria per la durata di 3 ore.



SGL LED - 3 x 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

cod.: RC0520LW-927 (version on-off)

cod.: RCD0520LW-927 (version DALI)

Recessed downlightLED, 220-240Vac, 12W,
2700K, CRI92, Standard 60° - White reflector

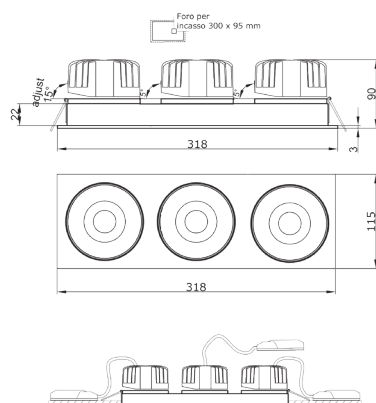

Description

modular ceiling recessed system
Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Upper LED frosted screen in PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 8100 lm.
White color temperature: 2700 K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 3.
Output flux of the equipment: 2103 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 12W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK08.
Quality marks: CE, RoHS..

Installation

Recessed installation.
Fixing by steel springs.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

Ø88x 88 x H.85mm, hole Ø75mm..

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORI



cod. REF020-S
(S) Riflettore silver lucido




cod. REF020-G
(G) Riflettore oro lucido



cod. LENO20-S
(S) Lente 24°



cod. LENO20-L
(L) Lente 60°





cod. KEM-90E
Kit emergenza per apparecchiature LED
completo di batteria per la durata di 3 ore.

SGL LED - 3 x 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

cod.: **RC0520LW-930** (version on-off)
 cod.: **RCD0520LW-930** (version DALI)
 Recessed downlightLED, 220-240Vac, 60W,
 3000K, CRI92, Standard 60°- White reflector

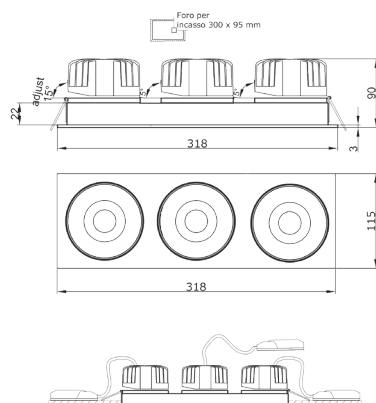

Description

modular ceiling recessed system
 Die-cast aluminum body.
 Powder coating anti-yellowing stabilized against UV rays.
 Reflectors in metallized PC.
 Upper LED frosted screen in PC.
 Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
 Nominal flux: 8100 lm.
 White color temperature: 3000 K.
 Color rendering index: CRI92.
 Lifetime: >50000h with L70.
 Number of light sources: 3.
 Output flux of the equipment: 2191 x 3 lm.

Electrical data

Driver power supply: input 220-240 Vac.
 Average system power consumption: 60W.
 Driver protections: Thermal, short circuit, overvoltage.
 Driver connection: whit Internal terminal block.
 Insulation class: II.
 Functions: On-Off / DALI

Technical Description

Frame finish: white.
 Lamp protection: IP44.
 Driver protection: IP20.
 Mechanical resistance: IK08.
 Quality marks: CE, RoHS..

Installation

Recessed installation.
 Fixing by steel springs.
 These devices are designed for modern control systems.
 For different options, see the "Light Control" section.

Dimensions

Ø318x 115 x H.87mm, hole Ø95mm.

Standard:

Quality marks: CE RoHS
 Standards: CEI EN 60598-1; CEI EN 60598-2-03.
 2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORI



cod. REF020-S
(S) Riflettore silver lucido




cod. REF020-G
(G) Riflettore oro lucido



cod. LENO20-S
(S) Lente 24°



cod. LENO20-L
(L) Lente 60°





cod. KEM-90E
Kit emergenza per apparecchiature LED
completo di batteria per la durata di 3 ore.

SGL LED - 3 x 20W

220V 240V	IP20 IP44	IK08		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

cod.: **RC0520LW-940** (version on-off)
 cod.: **RCD0520LW-940** (version DALI)
 Recessed downlight LED, 220-240Vac, 60W,
 4000K, CRI92, Standard 60°- White reflector

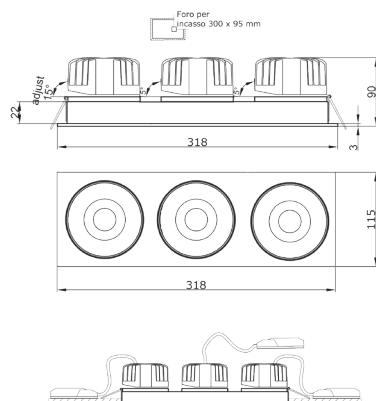

Description

modular ceiling recessed system
 Die-cast aluminum body.
 Powder coating anti-yellowing stabilized against UV rays.
 Reflectors in metallized PC.
 Upper LED frosted screen in PC.
 Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
 Nominal flux: 8100 lm.
 White color temperature: 4000 K.
 Color rendering index: CRI92.
 Lifetime: >50000h with L70.
 Number of light sources: 3.
 Output flux of the equipment: 2221 x 3 lm.

Electrical data

Driver power supply: input 220-240 Vac.
 Average system power consumption: 60W.
 Driver protections: Thermal, short circuit, overvoltage.
 Driver connection: whit Internal terminal block.
 Insulation class: II.
 Functions: On-Off / DALI

Technical Description

Frame finish: white.
 Lamp protection: IP44.
 Driver protection: IP20.
 Mechanical resistance: IK08.
 Quality marks: CE, RoHS..

Installation

Recessed installation.
 Fixing by steel springs.
 These devices are designed for modern control systems.
 For different options, see the "Light Control" section.

Dimensions

Ø318x 115 x H.87mm, hole Ø95mm.

Standard:

Quality marks: CE RoHS
 Standards: CEI EN 60598-1; CEI EN 60598-2-03.
 2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORI



cod. REF020-S
 (S) Riflettore silver lucido




cod. REF020-G
 (G) Riflettore oro lucido



cod. LENO20-S
 (S) Lente 24°



cod. LENO20-L
 (L) Lente 60°



cod. KEM-90E
 Kit emergenza per apparecchiature LED
 completo di batteria per la durata di 3 ore.