




SUI LED - 3 X 12W

220V 240V	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

Item.: **CE0136LW-927** (version on-off)

Item.: **CED0136LW-927** (version DALI)

Recessed downlight LED, 220-240Vac, 36W,
2700K, CRI92, White reflector - Standard 60° optics

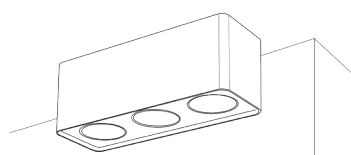

Description

Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 4860 lm.
White color temperature: 2700K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 3x1526 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 36W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK07.
Quality marks: CE, RoHS..

Installation

Ceiling or suspension installation
Fixing base in painted metal.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

L.298 x W.108 x H.110mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-S
(S) Glossy silver reflector



cod. REF012-G
(G) Shiny gold reflector



cod. LEN012-S
(N) Lens 15°



cod. LEN012-N
(S) Lens 24°



cod. LEN012-M
(M) Lens 36°



cod. SUS001
Suspension cable




SUI LED - 3 X 12W

220V 240V	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **CE0136LW-930** (version on-off)

Item.: **CED0136LW-930** (version DALI)

Recessed downlight LED, 220-240Vac, 36W,
3000K, CRI92, White reflector - Standard 60° optics

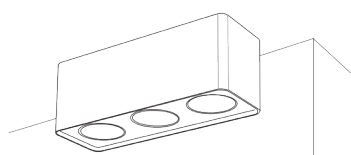

Description

Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 4860 lm.
White color temperature: 3000K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 3x1590 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 36W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK07.
Quality marks: CE, RoHS.

Installation

Ceiling or suspension installation
Fixing base in painted metal.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

L.298 x W.108 x H.110mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-S
(S) Glossy silver reflector



cod. REF012-G
(G) Shiny gold reflector



cod. LEN012-S
(N) Lens 15°



cod. LEN012-N
(S) Lens 24°



cod. LEN012-M
(M) Lens 36°



cod. SUS001
Suspension cable


SUI LED - 3 X 12W

220V 240V	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

Item.: **CE0136LW-940** (version on-off)

Item.: **CED0136LW-940** (version DALI)

Recessed downlight LED, 220-240Vac, 36W,
4000K, CRI92, White reflector - Standard 60° optics



Description

Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 4860 lm.
White color temperature: 4000K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 3x1611 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 36W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: white.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK07.
Quality marks: CE, RoHS.

Installation



Ceiling or suspension installation
Fixing base in painted metal.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

L.298 x W.108 x H.110mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

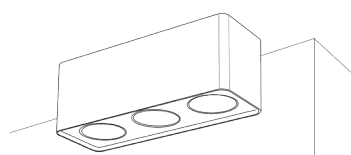

ACCESSORIES



cod. REF012-S
(S) Glossy silver reflector



cod. REF012-G
(G) Shiny gold reflector



cod. LEN012-S
(N) Lens 15°



cod. LEN012-N
(S) Lens 24°



cod. LEN012-M
(M) Lens 36°



cod. SUS001
Suspension cable




SUI LED - 3 X 12W

220V 240V	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **CE0136LB-927** (version on-off)

Item.: **CED0136LB-927** (version DALI)

Recessed downlightLED, 220-240Vac, 36W,
2700K, CRI92, Black reflector - Standard 60° optics

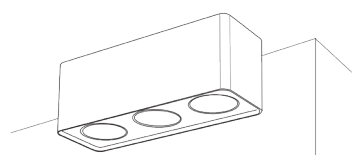

Description

Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 4860 lm.
White color temperature: 2700K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 3x1526 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 36W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: Black.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK07.
Quality marks: CE, RoHS.

Installation

Ceiling or suspension installation
Fixing base in painted metal.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

L.298 x W.108 x H.110mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-S
(S) Glossy silver reflector



cod. REF012-G
(G) Shiny gold reflector



cod. LEN012-S
(N) Lens 15°



cod. LEN012-N
(S) Lens 24°



cod. LEN012-M
(M) Lens 36°



cod. SUS001
Suspension cable




SUI LED - 3 X 12W

220V 240V	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE	RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	----	------	------------------

Item.: **CE0136LB-930** (version on-off)

Item.: **CED0136LB-930** (version DALI)

Recessed downlight LED, 220-240Vac, 36W,
3000K, CRI92, Black reflector - Standard 60° optics

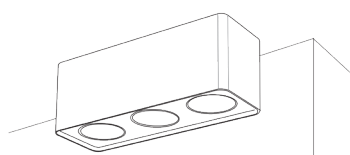

Description

Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 4860 lm.
White color temperature: 3000K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 3x1590 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 36W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: Black.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK07.
Quality marks: CE, RoHS.

Installation

Ceiling or suspension installation
Fixing base in painted metal.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

L.298 x W.108 x H.110mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-S
(S) Glossy silver reflector



cod. REF012-G
(G) Shiny gold reflector



cod. LEN012-S
(N) Lens 15°



cod. LEN012-N
(S) Lens 24°



cod. LEN012-M
(M) Lens 36°



cod. SUS001
Suspension cable




SUI LED - 3 X 12W

220V 240V	IP20 IP44	IK07		ECODESIGN COMPLIANT	CE RoHS	Ta -20° +45°C
--------------	--------------	------	--	------------------------	---------	------------------

Item.: **CE0136LB-940** (version on-off)

Item.: **CED0136LB-940** (version DALI)

Recessed downlight LED, 220-240Vac, 36W,
4000K, CRI92, Black reflector - Standard 60° optics

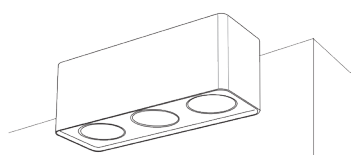

Description

Die-cast aluminum body.
Powder coating anti-yellowing stabilized against UV rays.
Reflectors in metallized PC.
Compliant: EN 60598-1 and EN 60598-2-2.

Light source

COB LED with nominal efficiency up to 135 lumens/Watt.
Nominal flux: 4860 lm.
White color temperature: 4000K.
Color rendering index: CRI92.
Lifetime: >50000h with L70.
Number of light sources: 1.
Output flux of the equipment: 3x1611 lm.

Electrical data

Driver power supply: input 220-240 Vac.
Average system power consumption: 36W.
Driver protections: Thermal, short circuit, overvoltage.
Driver connection: whit Internal terminal block.
Insulation class: II.
Functions: On-Off / DALI

Technical Description

Frame finish: Black.
Lamp protection: IP44.
Driver protection: IP20.
Mechanical resistance: IK07.
Quality marks: CE, RoHS.

Installation

Ceiling or suspension installation
Fixing base in painted metal.
These devices are designed for modern control systems.
For different options, see the "Light Control" section.

Dimensions

L.298 x W.108 x H.110mm

Standard:

Quality marks: CE RoHS
Standards: CEI EN 60598-1; CEI EN 60598-2-03.
2014/30/EU, 2014/35/EU; ELR Ecodesign 2019/2015

ACCESSORIES



cod. REF012-S
(S) Glossy silver reflector



cod. REF012-G
(G) Shiny gold reflector



cod. LEN012-S
(N) Lens 15°



cod. LEN012-N
(S) Lens 24°



cod. LEN012-M
(M) Lens 36°



cod. SUS001
Suspension cable