

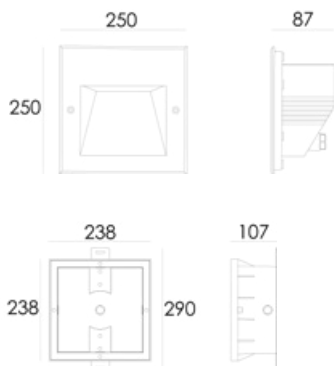


KAPE-LED



item: IG-L08-827

Recessed wall light,
24Vac, IP6, IK09, 20W, 2700K

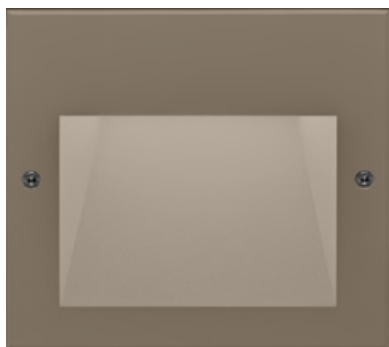

KAP-LED is a recessed outdoor wall-mounted . Indirect downward light with anti-corrosion treatment (adhesion 60-80µm ISO class 1 ATM CLASS4B). Stainless Steel recessed sleeve. Suitable for indoor and outdoor installations. The package includes the stainless steel outer casing for masonry installation. Power Cable H05RN-F neoprene cable 2×1.0mm², L=0.5m. (Maximum safety temperature on surface contact with the glass less than 50°C.

Light source

Light source: LED
Color temperature: 2700K
Color rendering index: CRI>80
Flow maintenance: L90 B10 100000 h
Useful output flux: 1100 lm
Luminous efficiency (LOR): 100%

Electrical data

External Driver
Power supply: 24Vdc
System power (Pin): 20W
Connection: Cable
Active PFC: 0.95
Functions performed: dimmable

Mechanical data


Front cover: 12# Die-casting aluminum powder coated T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Housing: 12# Die-casting aluminum powder coated T=60-80µm. Adhesion of ISO class 1/ASTM class 4B
Light windows: Temp. Glass
Protection rate: IP6
Mechanical impact resistance: IK09

Quality marks: CE RhOS (for all components)

Reference Standards:

CEI EN 60598-1, EN 62471, 2009/125/CE, 874/2012/CE, 2014/30/EU, 2014/35/EU, CEI EN 60598-2-2.

Ecodesign Directive ELR 2019/2015

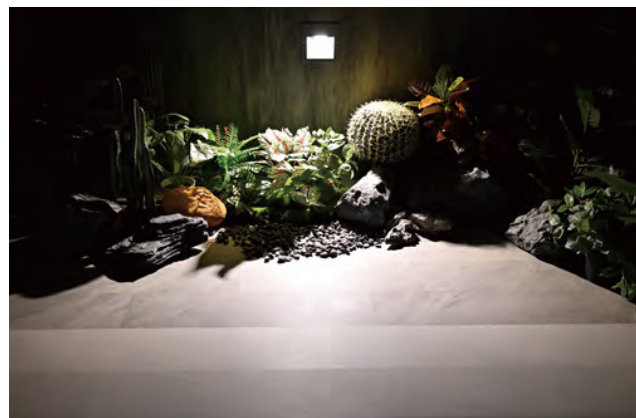

ACCESSORIES



cod. PELG-150-24-DA
DALI driver 150W - 24V - IP67
(one DALI power supply is matched with 5 pcs of fixtures)