



## Free Bending LED Line

item: STX-L16-927


Free bending / twistable dotless LED line  
24Vdc, 15W, 2700K, CRI>90, IP67

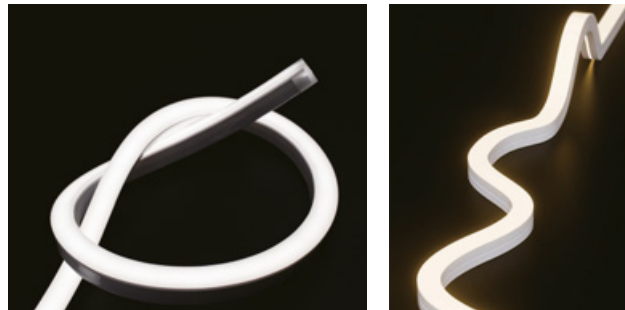


Available power cable in directions  
to be agreed upon at the time of ordering

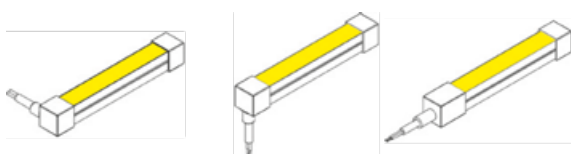

### Minimum Bend Radius

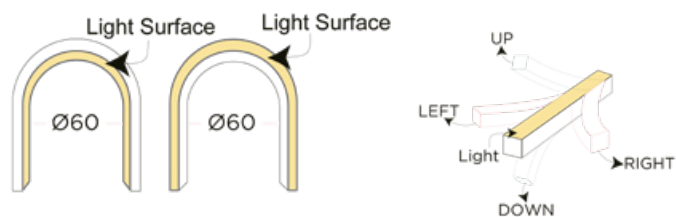

### FREE Bending

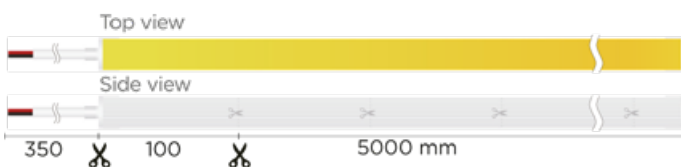

IP67 Free bending LED line, free-style installation.  
Unlimited applications, meets a variety of installation needs.  
Express your creativity and overcome space limitations.  
Two-tone silicone extrusion, UV-resistant and anti-yellowing.  
IP67 and salt spray resistant, bend diameter 80 mm.

### Light source

Light source: SMD LED  
Light source energy class: D (Ecodesign ELR 2019/2015)  
Color temperature: 2700K (SDCM3)  
Light output of the source: 180 lm/W  
Color rendering index: CRI>90  
Flow maintenance: L80 B10 50000 h  
Useful output flux: 950 lm/m  
Luminous efficiency (LOR): 100%

### Electrical data

Power supply: 24Vdc  
System power (Pin): 15W/m  
Connection: cable  
Insulation class: III  
Functions performed: dimmable



### Mechanical data

Housing: anti-yellowing and UV-resistant double silicon extrusion  
LED light source monochrome, milky light window  
Protection rate: IP67

Quality marks: CE RhOS (for all components)

Reference Standards:

CEI EN 60598-1, EN 62471, 2009/125/CE, 874/2012/CE,  
2014/30/EU, 2014/35/EU, CEI EN 60598-2-2.  
Ecodesign Directive ELR 2019/2015

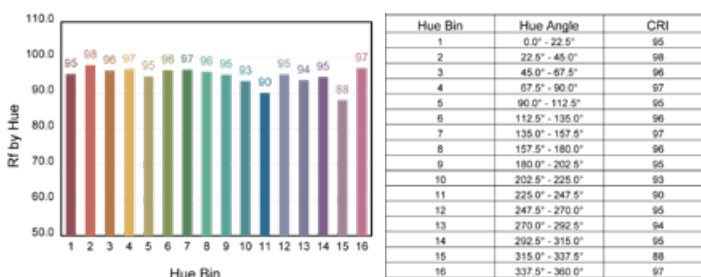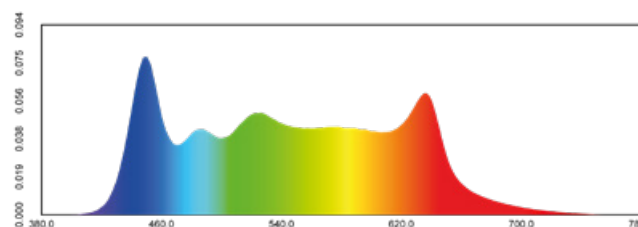

## ACCESSORIES



**cod. PAX-1616T-1**

1 mt  
Flexible stainless profile



**cod. PELG-150-24-DA**

DALI driver 150W - 24V - IP67  
(one DALI power supply is matched  
with 10 mt. LED Line)